

### PACKAGED GAS/ELECTRIC

#### PRODUCT SPECIFICATIONS



**15 SEER / 80% AFUE**

**2, 3, 4, & 5 Ton**

**SINGLE PHASE**

**COOLING CAPACITY: 23,200 – 56,500 BTU/H**

**HEATING CAPACITY: 69,000 – 138,000 BTU/H**

The Whirlpool Gold® brand WGGE45 packaged gas/electric unit uses the chlorine-free refrigerant R-410A and provides high-efficiency performance at reasonable operating costs. This unit is housed in a heavy-gauge, zinc-coated steel cabinet with a weather-resistant, powder-paint finish and allows for a ground-level or rooftop mount, horizontal or downflow application.

#### Standard Features

- Patented, heavy-duty stainless-steel heat exchanger for maximum efficiency
- High-efficiency compressor with factory-installed sound blanket; two-stage compressor on 3-, 4-, and 5-ton models
- EEM (energy-efficient) blower motor
- Fully charged R-410A system
- Copper tube, aluminum fin coils with TXV expansion device
- Redundant two-stage gas valve; natural gas with easy conversion to propane
- Power-assisted combustion
- Direct-spark ignition system, including a microprocessor-based control for the entire ignition sequence
- All blower operation and all safety circuits complete with self-diagnostics
- Loss-of-charge protection and high-pressure switch
- California Low NOx approved



#### Cabinet Features

- Fully insulated heavy-gauge, zinc-coated steel cabinet with UV-resistant powder-paint finish
- Compressor grommets for vibration isolation
- All models fit in a standard-size pick-up truck
- One roof curb fits all units
- Convenient access panels
- Bottom 2" high base rails for easier handling

#### Contents


Nomenclature.....	2
Product Specifications .....	3
Evaporator Blower Specifications.....	5
Expanded Cooling Data.....	8
Dimensions.....	32
Wiring Diagrams .....	33
Accessories .....	35



\* To receive the Lifetime Compressor Limited Warranty, Lifetime Heat Exchanger Limited Warranty, and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec. Full warranty details available at [www.whirlpoolhvac.com](http://www.whirlpoolhvac.com).

# PRODUCT SPECIFICATIONS

## NOMENCLATURE

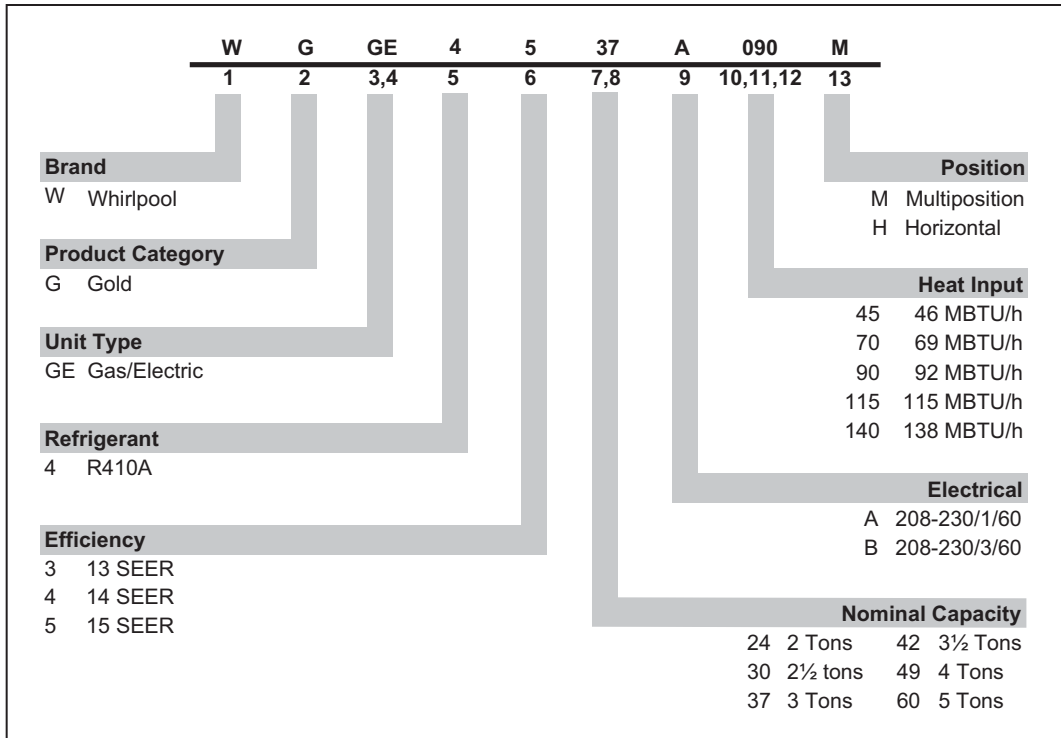

## PERFORMANCE RATINGS

Model #	Capacity (MBTU/h)	SEER <sup>1</sup>	EER <sup>2</sup>	AHRI #
WGGE4524A070M	23,200	15	12	1184771
WGGE4530A090M	29,500	15	12.0	TBD
WGGE4536A090M	35,400	15	11	1184772
WGGE4537A090M	35,800	15	12.1	TBD
WGGE4542A115M	40,500	15	12.2	TBD
WGGE4548A115M	47,500	15	11	1184773
WGGE4549A115M	47,000	15	12	TBD
WGGE4560A140M	56,500	14	10.1	1184774

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

**Important EnergyStar Notice:** EnergyStar ratings are dependent upon conditions beyond equipment installation. Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit [www.energystar.gov](http://www.energystar.gov).

**SPECIFICATIONS**

	<b>WGGE45 24A070M</b>	<b>WGGE45 30A090M</b>	<b>WGGE45 37A090M</b>	<b>WGGE45 42A115M</b>
<b>Cooling Capacity (BTU/h)</b>				
High-Stage Total <sup>2 3</sup>	23,200	29,500	35,800	40,500
Sensible <sup>2 3</sup>	18,500	22,500	26,300	30,300
EER <sup>2 3</sup>	12.0	12.0	12.1	12.2
Low-Stage Total <sup>2</sup>	---	---	---	---
SEER	15.0	15.0	15.0	15.0
Decibels	76	76	76	78
<b>Heating Capacity (BTU/h)</b>				
High-Fire Input <sup>2</sup>	69,000	92,000	92,000	115,000
High-Fire Output <sup>2</sup>	55,000	72,900	72,900	91,200
Low-Fire Input <sup>1</sup>	51,500	69,000	69,000	86,000
Low-Fire Output <sup>1</sup>	40,500	55,000	55,000	69,000
AFUE	80.0	80.0	80.0	80.0
Temperature Rise Range	35 - 65	35-65	35-65	45-75
No. of Burners	3.0	4	4	5
Orifice Size (Gas / LP)	43 / 55	43 / 55	43 / 55	43 / 55
<b>Evaporator Motor</b>				
Type	EEM (X-13)	EEM (X-13)	EEM (X-13)	EEM (X-13)
Wheel (DxW)	10" x 8"	10" x 9"	10" x 9"	11 x 10
Indoor Nominal CFM	845	1,050	1,050	1,200
Motor Speed Tap (Cooling)	T4	T3, T4	T3, T4	T3, T4
RPM / Amps (Cooling)	724 / 1.21	960 / 3.06	960 / 3.06	890 / 3.8
Horsepower / RPM	½ / 1,050	½ / ---	½ / ---	¾ / ---
<b>Evaporator Coil</b>				
Face Area (ft <sup>2</sup> )	4.33	4.33	4.33	5.67
Rows Deep / Fin per Inch	2 / 14	3 / 14	4 / 14	4 / 14
Expansion Device	TXV	0.065	TXV	0.072
Filter Size (ft <sup>2</sup> )	2.7	4.2	4.2	5.1
Drain Size (NPT)	¾"	¾"	¾"	¾"
Refrigerant Charge -- R-410A (oz.)	84	105	115	165
<b>Condenser Fan</b>				
Horsepower - RPM	1/6 - 850	¼ / 830	¼ / 830	¼ - 1,075
Fan Diameter / # of Fan Blades	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	2,400	2,700	2,700	3,500
<b>Condenser Coil</b>				
Face Area (ft <sup>2</sup> )	12.3	12.3	12.3	15.3
Row Deep / Fins per Inch	1 / 22	2 / 16	2 / 16	2 / 16
<b>Electrical Data</b>				
Voltage/ Phase/ Frequency	208-230/ 1/ 60	208-230/1/60	208-230/1/60	208-230/1/60
Compressor RLA / LRA	13.5 / 58.3	14.1 / 73	16.7 / 79	17.9 / 112
Indoor Blower FLA	4.1	1.85	1.85	2.87
Outdoor Fan FLA / LRA	1.1 / 1.7	1.5 / 3	1.5 / 3	1.4 / 2.9
Total Unit Amps	9.0	19.0	21.6	23.7
Min. Circuit Ampacity	22.1	21	24.2	26.6
Max. Overcurrent Protection	30	35	40	40
Entrance Size Power Supply	1½"	1½"	1½"	1½"
Entrance Size Control Voltage	7⁄8"	7⁄8"	7⁄8"	7⁄8"
<b>Operating Weight (lbs)</b>	417	453	458	538
<b>Ship Weight (lbs)</b>	439	475	480	560

<sup>2</sup> Two Stage (or Single Stage 2-ton only)

<sup>1</sup> Single Stage

<sup>3</sup> Outdoor Ambient Temperature @ 95°F

## PRODUCT SPECIFICATIONS

### SPECIFICATIONS (CONT.)

	WGGE45 49A115M	WGGE45 60A140M
<b>Cooling Capacity (BTU/h)</b>		
High-Stage Total <sup>2 3</sup>	47,000	56,500
Sensible <sup>2 3</sup>	34,000	44,000
EER <sup>2 3</sup>	11.5	10.1
Low-Stage Total <sup>2</sup>	33,000	62,000
SEER	15.0	14.0
Decibels	78	78
<b>Heating Capacity (BTU/h)</b>		
High-Fire Input <sup>2</sup>	115,000	138,000
High-Fire Output <sup>2</sup>	91,200	110,200
Low-Fire Input <sup>1</sup>	86,000	103,500
Low-Fire Output <sup>1</sup>	69,000	82,000
AFUE	80.0	80.0
Temperature Rise Range	45-75	45 - 75
No. of Burners	5	6.0
Orifice Size (Gas / LP)	43 / 55	43 / 55
<b>Evaporator Motor</b>		
Type	EEM (X-13)	EEM (X-13)
Wheel (DxW)	11" x 10"	11" x 10"
Indoor Nominal CFM	1,300	1,300 / 1,810
Motor Speed Tap (Cooling)	T3, T4	T3, T4
RPM / Amps (Cooling)	890 / 3.8	778 / 1.98 1,030 / 5.7
Horsepower / RPM	¾ / ---	1 / 1,050
<b>Evaporator Coil</b>		
Face Area (ft <sup>2</sup> )	5.67	5.67
Rows Deep / Fin per Inch	4 / 14	4 / 14
Expansion Device	TXV	TXV
Filter Size (ft <sup>2</sup> )	5.1	6.3
Drain Size (NPT)	¾"	¾"
Refrigerant Charge -- R-410A (oz.)	170	180
<b>Condenser Fan</b>		
Horsepower - RPM	⅓ - 1,075	⅓ - 1,075
Fan Diameter / # of Fan Blades	22" / 3	22" / 4
Outdoor Nominal CFM	3,500	3,500
<b>Condenser Coil</b>		
Face Area (ft <sup>2</sup> )	15.3	15.3
Row Deep / Fins per Inch	2 / 16	2 / 16
<b>Electrical Data</b>		
Voltage/ Phase/ Frequency	208-230/1/60	208-230/1/60
Compressor RLA / LRA	21.2 / 96	25.8 / 118
Indoor Blower FLA	2.87	7.6
Outdoor Fan FLA / LRA	1.4 / 2.9	2.4 / 5.2
Total Unit Amps	27.0	26.8
Min. Circuit Ampacity	30.8	42.1
Max. Overcurrent Protection	50	60
Entrance Size Power Supply	1½"	1½"
Entrance Size Control Voltage	⅞"	⅞"
<b>Operating Weight (lbs)</b>	538	543
<b>Ship Weight (lbs)</b>	560	565

<sup>1</sup> Single Stage

<sup>3</sup> Outdoor Ambient Temperature @ 95°F

# EVAPORATOR BLOWER SPECIFICATIONS

WGGE4524A070M - Rise Range: 35° - 65°																	
Unit Static	T1 - 1st Stage Heating				T2 - 2nd Stage Heating				T3 - Cooling Speed			T4 - Cooling Speed			T5 - Cooling Speed		
	CFM	Watts	Amps	Rise	CFM	Watts	Amps	Rise	CFM	Watts	Amps	CFM	Watts	Amps	CFM	Watts	Amps
0.1	742	84	0.75	52	907	134	1.18	57	857	116	1.04	907	134	1.18	1,040	185	1.33
0.2	677	89	0.82	57	857	140	1.24	61	816	126	1.16	857	140	1.24	988	198	1.40
0.3	631	97	0.90	62	814	149	1.32	64	760	131	1.18	814	149	1.32	949	208	1.42
0.4	575	101	0.92	X	761	154	1.33	X	721	140	1.25	761	154	1.33	903	213	1.49
0.5	526	111	1.01	X	727	165	1.41	X	670	145	1.31	727	165	1.41	871	222	1.55
0.6	-	-	-	-	678	169	1.47	X	629	155	1.39	678	169	1.47	824	228	1.58
0.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

WGGE4530A090M - Rise Range: 45° - 75°																	
Unit Static	T1 - 1st Stage Heating				T2 - 2nd Stage Heating				T3 - Cooling Speed			T4 - Cooling Speed			T5 - Cooling Speed		
	CFM	Watts	Amps	Rise	CFM	Watts	Amps	Rise	CFM	Watts	Amps	CFM	Watts	Amps	CFM	Watts	Amps
0.1	1,065	168	1.42	49	1,255	257	2.10	55	1,148	170	1.55	1,148	170	1.55	1,333	304	2.41
0.2	1,003	174	1.48	52	1,217	269	2.19	57	1,092	176	1.66	1,092	176	1.66	1,293	314	2.48
0.3	961	185	1.55	54	1,165	274	2.21	59	1,044	184	1.72	1,044	184	1.72	1,237	321	2.54
0.4	913	195	1.62	57	1,113	285	2.30	62	994	194	1.77	994	194	1.77	1,193	333	2.71
0.5	855	202	1.69	60	1,073	296	2.36	64	929	210	1.89	929	210	1.89	1,158	341	2.77
0.6	814	212	1.76	63	1,018	302	2.41	68	811	222	1.99	811	222	1.99	1,101	345	2.78
0.7	749	218	1.82	69	991	313	2.48	70	763	224	2.03	763	224	2.03	-	-	-
0.8	713	227	1.87	72	-	-	-	-	715	236	2.07	715	236	2.07	-	-	-

WGGE4537A090M - Rise Range: 45° - 75°																	
Unit Static	T1 - 1st Stage Heating				T2 - 2nd Stage Heating				T3 - Cooling Speed			T4 - Cooling Speed			T5 - Cooling Speed		
	CFM	Watts	Amps	Rise	CFM	Watts	Amps	Rise	CFM	Watts	Amps	CFM	Watts	Amps	CFM	Watts	Amps
0.1	1,065	168	1.42	49	1,255	257	2.10	55	1,148	170	1.55	1,148	170	1.55	1,418	360	2.92
0.2	1,003	174	1.48	52	1,217	269	2.19	57	1,092	176	1.66	1,092	176	1.66	1,375	371	3.00
0.3	961	185	1.55	54	1,165	274	2.21	59	1,044	184	1.72	1,044	184	1.72	1,316	376	3.05
0.4	913	195	1.62	57	1,113	285	2.30	62	994	194	1.77	994	194	1.77	1,279	387	3.13
0.5	855	202	1.69	60	1,073	296	2.36	64	929	210	1.89	929	210	1.89	1,245	392	3.19
0.6	814	212	1.76	63	1,018	302	2.41	68	811	222	1.99	811	222	1.99	1,193	400	3.22
0.7	749	218	1.82	69	991	313	2.48	70	763	224	2.03	763	224	2.03	-	-	-
0.8	713	227	1.87	72	-	-	-	-	715	236	2.07	715	236	2.07	-	-	-

# PRODUCT SPECIFICATIONS


## EVAPORATOR BLOWER SPECIFICATIONS (CONT.)

WGGE4542A115M - Rise Range: 45° - 75°																	
Unit Static	T1 - 1st Stage Heating				T2 - 2nd Stage Heating				T3 - Cooling Speed			T4 - Cooling Spped			T5 - Cooling Spped		
	CFM	Watts	Amps	Rise	CFM	Watts	Amps	Rise	CFM	Watts	Amps	CFM	Watts	Amps	CFM	Watts	Amps
0.1	1,065	168	1.42	49	1,255	257	2.10	55	1,335	260	1.01	1,468	337	1.28	1,619	431	1.64
0.2	1,003	174	1.48	52	1,217	269	2.19	57	1,274	268	1.04	1,412	349	1.33	1,560	445	1.69
0.3	961	185	1.55	54	1,165	274	2.21	59	1,204	281	1.10	1,346	359	1.37	1,504	456	1.71
0.4	913	195	1.62	57	1,113	285	2.30	62	1,136	287	1.11	1,275	363	1.40	1,441	463	1.76
0.5	855	202	1.69	60	1,073	296	2.36	64	1,069	300	1.15	1,221	370	1.44	1,380	475	1.80
0.6	814	212	1.76	63	1,018	302	2.41	68	1,009	312	1.19	1,170	386	1.47	1,325	489	1.84
0.7	749	218	1.82	69	991	313	2.48	70	946	319	1.22	1,105	397	1.52	1,268	495	1.88
0.8	713	227	1.87	72	-	-	-	-	886	331	1.27	1,042	406	1.54	1,198	502	1.90

WGGE4549A115M - Rise Range: 45° - 75°																	
Unit Static	T1 - 1st Stage Heating				T2 - 2nd Stage Heating				T3 - 1st Stage Cooling			T4 - 2nd Stage Cooling			T5 - Cooling Spped		
	CFM	Watts	Amps	Rise	CFM	Watts	Amps	Rise	CFM	Watts	Amps	CFM	Watts	Amps	CFM	Watts	Amps
0.1	1140	178	1.52	56	1417	305	2.46	61	1,468	337	1.28	1,468	337	1.28	1,696	503	4.04
0.2	1090	188	1.57	59	1374	318	2.56	63	1,412	349	1.33	1,412	349	1.33	1,650	517	4.15
0.3	1038	199	1.67	62	1322	327	2.68	65	1,346	359	1.37	1,346	359	1.37	1,608	530	4.25
0.4	980	212	1.76	65	1273	338	2.72	68	1,275	363	1.40	1,275	363	1.40	1,566	543	4.39
0.5	914	220	1.79	70	1224	352	2.82	70	1,221	370	1.44	1,221	370	1.44	1,523	556	4.43
0.6	852	231	1.9	75	1176	365	2.88	73	1,170	386	1.47	1,170	386	1.47	1,480	569	4.55
0.7	806	242	1.97	X	1121	379	2.93	X	1,105	397	1.52	1,105	397	1.52	1,441	580	4.65
0.8	741	248	2.01	X	1068	391	2.98	X	1,042	406	1.54	1,042	406	1.54	-	-	-

WGGE4560A140M - Rise Range: 45° - 75°																	
Unit Static	T1 - 1st Stage Heating				T2 - 2nd Stage Heating				T3 - 1st Stage Cooling			T4 - 2nd Stage Cooling			T5 - Cooling Spped		
	CFM	Watts	Amps	Rise	CFM	Watts	Amps	Rise	CFM	Watts	Amps	CFM	Watts	Amps	CFM	Watts	Amps
0.1	1773	488	3.64	X	1773	488	3.64	58	1,379	246	1.95	1,919	700	4.81	2,115	783	5.54
0.2	1713	501	3.73	45	1713	501	3.73	61	1,322	258	2.03	1,862	714	4.94	2,078	787	5.57
0.3	1693	509	3.78	45	1693	509	3.78	61	1,268	266	2.10	1,810	720	5.01	2,009	802	5.67
0.4	1653	518	3.84	46	1653	518	3.84	63	1,187	280	2.19	1,755	734	5.07	1,953	813	5.87
0.5	1597	529	3.91	48	1597	529	3.91	65	1,133	287	2.23	1,705	743	5.09	1,933	805	5.77
0.6	1534	541	3.99	50	1534	541	3.99	68	1,068	294	2.29	1,647	748	5.16	-	-	-
0.7	1485	552	4.09	52	1485	552	4.09	70	1,026	307	2.38	-	-	-	-	-	-
0.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

# EVAPORATOR BLOWER SPECIFICATIONS (CONT.)

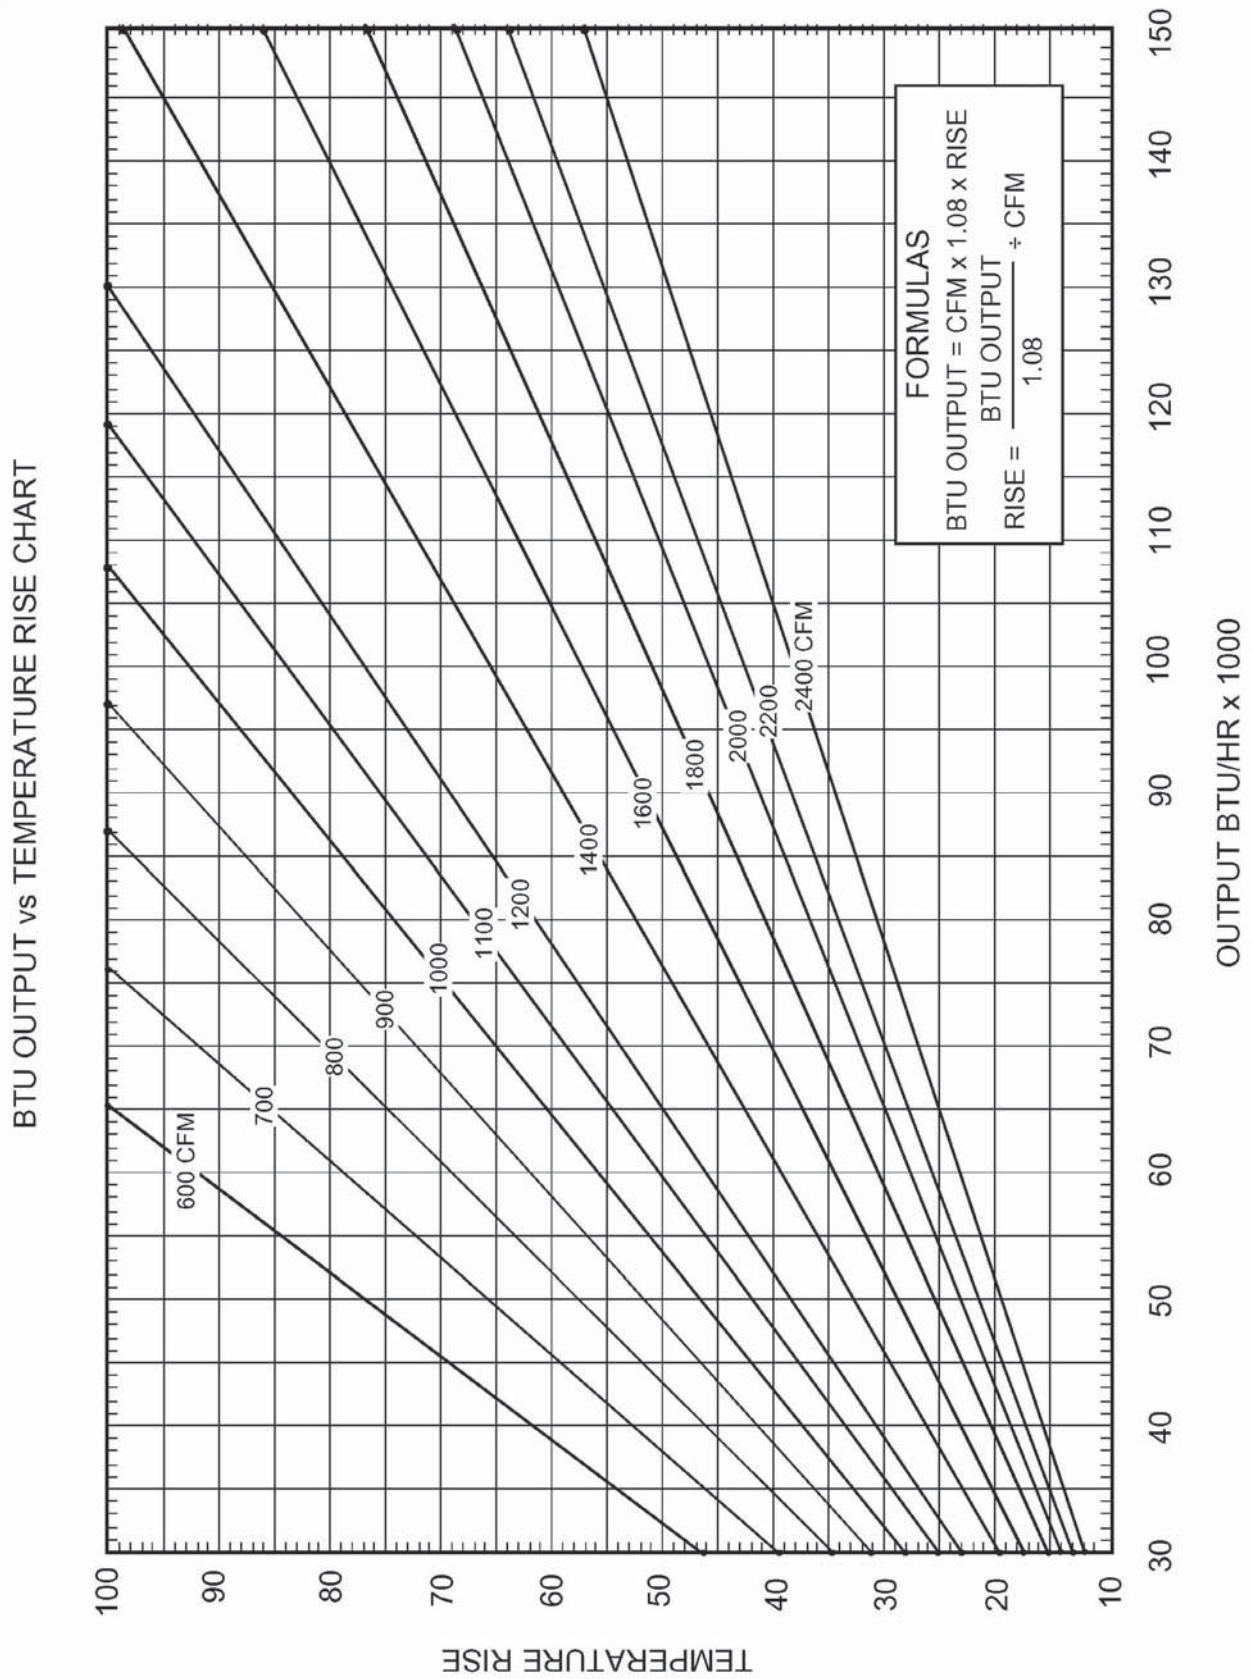

# EXPANDED COOLING DATA — WGGE4524A\*\*\*M

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	951	MBh	22.7	23.6	25.8	-	22.2	23.0	25.2	-	21.7	22.5	24.6	-	21.1	21.9	24.0	-	20.1	20.8	22.8	-	18.6	19.3	21.1	-
		S/T	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.89	0.74	0.52	-	0.90	0.75	0.52	-
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
		kW	1.51	1.54	1.59	-	1.62	1.66	1.71	-	1.72	1.76	1.82	-	1.82	1.86	1.92	-	1.89	1.93	2.00	-	1.96	2.00	2.07	-
		Amps	7.0	7.2	7.4	-	7.5	7.7	7.9	-	8.0	8.2	8.4	-	8.5	8.7	8.9	-	9.0	9.2	9.4	-	9.4	9.6	9.9	-
		Hi/PR	227	244	257	-	254	274	289	-	289	311	328	-	329	354	374	-	370	399	421	-	409	440	465	-
	845	Lo/PR	109	116	127	-	115	123	134	-	120	128	139	-	126	134	146	-	132	140	153	-	137	145	159	-
		MBh	22.1	22.9	25.1	-	21.6	22.3	24.5	-	21.0	21.8	23.9	-	20.5	21.3	23.3	-	19.5	20.2	22.2	-	18.1	18.7	20.5	-
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		kW	1.49	1.53	1.57	-	1.61	1.64	1.70	-	1.71	1.75	1.80	-	1.80	1.84	1.90	-	1.88	1.92	1.98	-	1.94	1.99	2.05	-
		Amps	7.0	7.1	7.3	-	7.4	7.6	7.8	-	8.0	8.1	8.4	-	8.4	8.6	8.9	-	8.9	9.1	9.3	-	9.4	9.6	9.8	-
739	951	Hi/PR	224	241	255	-	252	271	286	-	286	308	325	-	326	351	370	-	367	395	417	-	405	436	460	-
		Lo/PR	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-	135	144	157	-
		MBh	20.4	21.1	23.1	-	19.9	20.6	22.6	-	19.4	20.1	22.1	-	19.0	19.6	21.5	-	18.0	18.7	20.4	-	16.7	17.3	18.9	-
		S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.47	-	0.83	0.69	0.48	-
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
		kW	1.46	1.49	1.54	-	1.57	1.60	1.66	-	1.67	1.70	1.76	-	1.76	1.79	1.85	-	1.83	1.87	1.93	-	1.89	1.94	2.00	-
	845	Amps	6.8	7.0	7.1	-	7.3	7.4	7.6	-	7.8	8.0	8.2	-	8.2	8.4	8.6	-	8.7	8.9	9.1	-	9.1	9.3	9.6	-
		Hi/PR	218	234	247	-	244	263	277	-	278	299	315	-	316	340	359	-	356	383	404	-	393	423	447	-
		Lo/PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	140	-	127	135	147	-	131	139	152	-

75	951	MBh	23.1	23.8	25.8	27.7	22.6	23.3	25.2	27.0	22.0	22.7	24.6	26.4	21.5	22.1	24.0	25.7	20.4	21.0	22.8	24.4	18.9	19.5	21.1	22.6
		S/T	0.89	0.80	0.60	0.39	0.92	0.83	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.87	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.91	0.69	0.45
		ΔT	20	18	15	10	20	19	15	10	20	19	15	11	20	19	15	11	20	18	15	10	18	17	14	10
		kW	1.52	1.55	1.60	1.65	1.64	1.67	1.72	1.78	1.74	1.78	1.84	1.90	1.83	1.87	1.93	2.00	1.91	1.95	2.02	2.08	1.98	2.02	2.09	2.16
		Amps	7.1	7.2	7.4	7.6	7.6	7.7	7.9	8.2	8.1	8.3	8.5	8.8	8.6	8.7	9.0	9.3	9.0	9.2	9.5	9.8	9.5	9.7	10.0	10.3
		Hi/PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	443	413	445	470	490
	845	Lo/PR	110	117	128	136	117	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	171
		MBh	22.4	23.1	25.0	26.8	21.9	22.6	24.4	26.2	21.4	22.0	23.9	25.6	20.9	21.5	23.3	25.0	19.8	20.4	22.1	23.7	18.4	18.9	20.5	22.0
		S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.86	0.65	0.42	0.98	0.87	0.66	0.42
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
		kW	1.51	1.54	1.59	1.64	1.62	1.66	1.71	1.77	1.72	1.76	1.82	1.88	1.82	1.86	1.92	1.98	1.89	1.93	2.00	2.07	1.96	2.00	2.07	2.14
		Amps	7.0	7.2	7.4	7.6	7.5	7.7	7.9	8.1	8.0	8.2	8.4	8.7	8.5	8.7	8.9	9.2	9.0	9.2	9.4	9.7	9.4	9.6	9.9	10.2
739	Hi/PR	227	244	257	269	254	274	289	301	289	311	329	343	329	354	374	390	370	399	421	439	409	441	465	485	
	Lo/PR	109	116	127	135	115	123	134	143	120	128	139	148	126	134	146	156	132	140	153	163	137	145	159	169	
	MBh	20.7	21.3	23.1	24.8	20.2	20.8	22.6	24.2	19.8	20.3	22.0	23.6	19.3	19.8	21.5	23.1	18.3	18.9	20.4	21.9	17.0	17.5	18.9	20.3	
	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41	
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	21	20	16	11	
	kW	1.47	1.50	1.55	1.60	1.58	1.62	1.67	1.72	1.68	1.72	1.77	1.83	1.77	1.81	1.87	1.93	1.84	1.89	1.95	2.01	1.91	1.95	2.02	2.09	
739	Amps	6.9	7.0	7.2	7.4	7.3	7.5	7.7	7.9	7.9	8.0	8.2	8.5	8.3	8.5	8.7	9.0	8.8	8.9	9.2	9.5	9.2	9.4	9.7	10.0	
	Hi/PR	220	237	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471	
	Lo/PR	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	149	158	132	141	154	164	

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

Shaded area reflects ACCA (TVA) conditions.

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.



EXPANDED COOLING DATA — WGGE4524A\*\*\*M (CONT.)

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	23.5	24.0	25.7	27.5	23.0	23.5	25.1	26.8	22.4	22.9	24.5	26.2	21.9	22.4	23.9	25.5	20.8	21.2	22.7	24.3	19.3	19.7	21.0	22.5
	S/T	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.63	1.00	1.00	0.86	0.64
	ΔT	23	21	19	15	22	22	19	15	21	22	19	15	21	22	19	15	20	21	19	15	19	19	17	14
	kW	1.53	1.56	1.61	1.66	1.65	1.68	1.74	1.80	1.75	1.79	1.85	1.91	1.85	1.89	1.95	2.01	1.92	1.97	2.03	2.10	1.99	2.04	2.11	2.18
	Amps	7.1	7.3	7.5	7.7	7.6	7.8	8.0	8.2	8.2	8.3	8.6	8.8	8.6	8.8	9.1	9.4	9.1	9.3	9.6	9.9	9.6	9.8	10.1	10.4
	Hi PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495
	Lo PR	111	119	129	138	118	125	137	146	122	130	142	151	129	137	149	159	135	143	156	167	139	148	162	172
	MBh	22.8	23.3	24.9	26.7	22.3	22.8	24.4	26.0	21.8	22.3	23.8	25.4	21.3	21.7	23.2	24.8	20.2	20.6	22.0	23.6	18.7	19.1	20.4	21.8
	S/T	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.99	0.81	0.61	1.00	1.00	0.82	0.61
	ΔT	23	22	19	15	23	22	20	16	23	22	20	16	23	23	20	16	22	22	19	16	20	21	18	14
	kW	1.52	1.55	1.60	1.65	1.64	1.67	1.73	1.78	1.74	1.78	1.84	1.90	1.83	1.87	1.93	2.00	1.91	1.95	2.02	2.08	1.98	2.02	2.09	2.16
	Amps	7.1	7.2	7.4	7.7	7.6	7.7	7.9	8.2	8.1	8.3	8.5	8.8	8.6	8.8	9.0	9.3	9.0	9.2	9.5	9.8	9.5	9.7	10.0	10.3
Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	444	413	445	470	490	
Lo PR	110	117	128	136	117	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	171	
MBh	21.1	21.5	23.0	24.6	20.6	21.0	22.5	24.0	20.1	20.5	21.9	23.5	19.6	20.0	21.4	22.9	18.6	19.0	20.3	21.7	17.3	17.6	18.8	20.1	
S/T	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.95	0.90	0.73	0.54	0.99	0.92	0.75	0.56	1.02	0.96	0.78	0.58	1.03	0.97	0.79	0.59	
ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15	
kW	1.48	1.51	1.56	1.61	1.60	1.63	1.68	1.74	1.70	1.73	1.79	1.85	1.78	1.82	1.88	1.95	1.86	1.90	1.96	2.03	1.93	1.97	2.03	2.10	
Amps	6.9	7.1	7.3	7.5	7.4	7.5	7.7	8.0	7.9	8.1	8.3	8.6	8.4	8.5	8.8	9.1	8.8	9.0	9.3	9.6	9.3	9.5	9.7	10.1	
Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	
Lo PR	107	114	124	132	113	120	131	140	118	125	136	145	123	131	143	153	129	138	150	160	134	142	155	165	

85	MBh	23.9	24.4	25.6	27.3	23.4	23.8	25.0	26.6	22.8	23.3	24.4	26.0	22.3	22.7	23.8	25.4	21.2	21.6	22.6	24.1	19.6	20.0	20.9	22.3
	S/T	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.83
	ΔT	23	23	22	19	23	23	22	19	22	23	22	19	22	22	22	19	20	21	22	19	19	19	20	18
	kW	1.54	1.58	1.63	1.68	1.66	1.70	1.75	1.81	1.77	1.81	1.87	1.93	1.86	1.90	1.97	2.03	1.94	1.98	2.05	2.12	2.01	2.05	2.12	2.20
	Amps	7.2	7.3	7.5	7.8	7.7	7.8	8.0	8.3	8.2	8.4	8.6	8.9	8.7	8.9	9.1	9.4	9.2	9.4	9.7	10.0	9.7	9.9	10.2	10.5
	Hi PR	233	251	265	277	262	282	298	310	298	321	339	353	339	365	386	402	382	411	434	452	422	454	479	500
	Lo PR	113	120	131	139	119	126	138	147	124	131	144	153	130	138	151	161	136	145	158	168	141	150	163	174
	MBh	23.2	23.7	24.8	26.5	22.7	23.1	24.2	25.9	22.2	22.6	23.7	25.2	21.6	22.0	23.1	24.6	20.5	20.9	21.9	23.4	19.0	19.4	20.3	21.7
	S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79
	ΔT	25	24	23	20	25	25	23	20	24	25	23	20	24	24	23	20	22	23	23	20	21	21	22	19
	kW	1.53	1.56	1.61	1.66	1.65	1.68	1.74	1.80	1.75	1.79	1.85	1.91	1.85	1.89	1.95	2.01	1.92	1.97	2.03	2.10	1.99	2.04	2.11	2.18
	Amps	7.1	7.3	7.5	7.7	7.6	7.8	8.0	8.2	8.2	8.3	8.6	8.8	8.6	8.8	9.1	9.4	9.1	9.3	9.6	9.9	9.6	9.8	10.1	10.4
Hi PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495	
Lo PR	111	119	129	138	118	125	137	146	122	130	142	151	129	137	149	159	135	143	156	167	139	148	162	172	
MBh	21.5	21.9	22.9	24.4	21.0	21.4	22.4	23.9	20.5	20.9	21.8	23.3	20.0	20.3	21.3	22.7	19.0	19.3	20.2	21.6	17.6	17.9	18.7	20.0	
S/T	0.94	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	
ΔT	25	25	23	20	25	25	24	20	25	25	24	20	25	25	24	21	24	24	23	20	22	22	22	19	
kW	1.49	1.53	1.57	1.62	1.61	1.64	1.70	1.75	1.71	1.75	1.80	1.86	1.80	1.84	1.90	1.96	1.88	1.92	1.98	2.05	1.94	1.99	2.05	2.12	
Amps	7.0	7.1	7.3	7.5	7.4	7.6	7.8	8.0	8.0	8.1	8.4	8.6	8.4	8.6	8.9	9.1	8.9	9.1	9.3	9.7	9.3	9.5	9.8	10.2	
Hi PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	435	405	436	460	480	
Lo PR	108	115	126	134	114	121	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	

Amps = outdoor unit amps (comp.+fan)  
kW = Total system power

Shaded area reflects AHRI conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

# EXPANDED COOLING DATA — WGGE4530A090M

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1125	MBh	28.9	30.0	32.8	-	28.2	29.3	32.1	-	27.6	28.6	31.3	-	26.9	27.9	30.5	-	25.5	26.5	29.0	-	23.7	24.5	26.9	-
		S/T	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.87	0.73	0.50	-	0.88	0.73	0.51	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	
	kW	1.85	1.89	1.94	-	1.99	2.03	2.09	-	2.11	2.16	2.23	-	2.22	2.27	2.34	-	2.31	2.37	2.44	-	2.39	2.45	2.53	-	
	Amps	9.0	9.1	9.4	-	9.5	9.7	10.0	-	10.2	10.4	10.7	-	10.7	11.0	11.2	-	11.3	11.5	11.8	-	11.8	12.1	12.4	-	
	Hi PR	226	243	256	-	253	273	288	-	288	310	327	-	328	353	373	-	369	397	419	-	408	439	463	-	
	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	136	148	-	132	140	153	-	
	MBh	28.1	29.1	31.9	-	27.4	28.4	31.1	-	26.8	27.7	30.4	-	26.1	27.1	29.6	-	24.8	25.7	28.2	-	23.0	23.8	26.1	-	
	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-	
	ΔT	19	16	12	-	19	16	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-	
kW	1.83	1.87	1.93	-	1.97	2.01	2.08	-	2.09	2.14	2.21	-	2.20	2.25	2.32	-	2.30	2.35	2.42	-	2.37	2.43	2.51	-		
Amps	8.9	9.1	9.3	-	9.5	9.6	9.9	-	10.1	10.3	10.6	-	10.7	10.9	11.2	-	11.2	11.4	11.8	-	11.8	12.0	12.3	-		
Hi PR	223	240	254	-	251	270	285	-	285	307	324	-	325	350	369	-	365	393	415	-	404	434	459	-		
Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	147	-	130	139	152	-		
MBh	25.9	26.8	29.4	-	25.3	26.2	28.7	-	24.7	25.6	28.0	-	24.1	25.0	27.4	-	22.9	23.7	26.0	-	21.2	22.0	24.1	-		
S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-		
ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-		
kW	1.79	1.83	1.88	-	1.92	1.97	2.03	-	2.04	2.09	2.15	-	2.15	2.20	2.27	-	2.24	2.29	2.36	-	2.32	2.37	2.44	-		
Amps	8.7	8.9	9.1	-	9.3	9.4	9.7	-	9.9	10.1	10.3	-	10.4	10.6	10.9	-	11.0	11.2	11.5	-	11.5	11.7	12.0	-		
Hi PR	217	233	246	-	243	262	276	-	277	298	314	-	315	339	358	-	354	381	403	-	392	421	445	-		
Lo PR	101	108	118	-	107	114	124	-	111	118	129	-	117	124	136	-	122	130	142	-	127	135	147	-		

75	1125	MBh	29.4	30.3	32.8	35.2	28.7	29.6	32.0	34.3	28.0	28.9	31.2	33.5	27.3	28.2	30.5	32.7	26.0	26.7	29.0	31.1	24.1	24.8	26.8	28.8
		S/T	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.92	0.83	0.63	0.40	0.95	0.85	0.65	0.42	0.99	0.89	0.67	0.43	1.00	0.89	0.68	0.43
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	20	16	11	21	19	16	11	20	18	15	10	
	kW	1.86	1.90	1.96	2.02	2.00	2.05	2.11	2.18	2.13	2.18	2.25	2.32	2.24	2.29	2.36	2.44	2.33	2.39	2.46	2.55	2.41	2.47	2.55	2.64	
	Amps	9.0	9.2	9.4	9.7	9.6	9.8	10.0	10.3	10.3	10.5	10.7	11.1	10.8	11.0	11.3	11.7	11.4	11.6	11.9	12.3	11.9	12.2	12.5	12.9	
	Hi PR	228	245	259	270	256	275	291	303	291	313	331	345	331	357	377	393	373	401	424	442	412	443	468	488	
	Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	
	MBh	28.5	29.4	31.8	34.1	27.9	28.7	31.1	33.3	27.2	28.0	30.3	32.6	26.6	<b>27.3</b>	29.6	31.8	25.2	26.0	28.1	30.2	23.4	24.1	26.0	27.9	
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	<b>0.81</b>	0.62	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	<b>20</b>	17	12	22	20	17	11	20	19	15	11	
kW	1.85	1.89	1.95	2.01	1.99	2.03	2.10	2.16	2.11	2.16	2.23	2.30	2.22	<b>2.27</b>	2.34	2.42	2.31	2.37	2.44	2.53	2.39	2.45	2.53	2.61		
Amps	9.0	9.1	9.4	9.6	9.5	9.7	10.0	10.3	10.2	10.4	10.7	11.0	10.7	<b>11.0</b>	11.2	11.6	11.3	11.5	11.8	12.2	11.8	12.1	12.4	12.8		
Hi PR	226	243	257	268	253	273	288	300	288	310	327	341	328	<b>353</b>	373	389	369	397	419	438	408	439	463	483		
Lo PR	105	112	122	130	111	118	129	138	116	123	134	143	122	<b>129</b>	141	150	127	136	148	158	132	140	153	163		
MBh	26.3	27.1	29.4	31.5	25.7	26.5	28.7	30.8	25.1	25.9	28.0	30.0	24.5	25.2	27.3	29.3	23.3	24.0	25.9	27.8	21.6	22.2	24.0	25.8		
S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40		
ΔT	22	20	17	12	22	21	17	12	22	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11		
kW	1.80	1.84	1.90	1.96	1.94	1.98	2.04	2.11	2.06	2.11	2.17	2.24	2.17	2.21	2.29	2.36	2.26	2.31	2.38	2.46	2.34	2.39	2.47	2.55		
Amps	8.8	9.0	9.2	9.4	9.3	9.5	9.8	10.0	10.0	10.2	10.4	10.7	10.5	10.7	11.0	11.3	11.0	11.3	11.6	11.9	11.6	11.8	12.1	12.5		
Hi PR	219	236	249	260	246	264	279	291	279	301	318	331	318	343	362	377	358	385	407	424	396	426	450	469		
Lo PR	102	109	119	126	108	115	125	134	112	119	130	139	118	125	137	146	124	132	144	153	128	136	148	158		

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Design Subcooling, 7° F @ liquid access fitting connection AHRI 95 test conditions;  
 Superheat 5° F @ compressor suction access fitting connection.

EXPANDED COOLING DATA — WGGE4530A090M (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1125	MBh	29.9	30.6	32.7	34.9	29.2	29.9	31.9	34.1	28.5	29.2	31.1	33.3	27.8	28.4	30.4	32.5	26.4	27.0	28.9	30.9	24.5	25.0	26.7	28.6	
		S/T	0.95	0.89	0.73	0.54	1.00	0.93	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.84	0.62	
	1000	ΔT	23	22	19	16	24	23	20	16	23	23	20	16	23	23	20	16	22	22	20	16	22	20	18	15	
		kW	1.88	1.92	1.98	2.04	2.02	2.06	2.13	2.20	2.15	2.19	2.26	2.34	2.26	2.31	2.38	2.46	2.35	2.41	2.48	2.57	2.44	2.49	2.57	2.66	
	875	Amps	9.1	9.3	9.5	9.8	9.7	9.9	10.1	10.4	10.3	10.5	10.8	11.1	10.9	11.1	11.4	11.8	11.5	11.7	12.0	12.4	12.0	12.3	12.6	13.0	
		Hi PR	230	248	262	273	258	278	294	306	294	316	334	348	335	360	380	397	377	405	428	446	416	448	473	493	
	80	1125	Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166
			MBh	29.0	29.7	31.7	33.9	28.4	29.0	31.0	33.1	27.7	28.3	30.2	32.3	27.0	27.6	29.5	31.5	25.7	26.2	28.0	30.0	23.8	24.3	26.0	27.8
		1000	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.60
			ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	16	24	23	20	16	22	22	19	15
875		kW	1.86	1.90	1.96	2.02	2.00	2.05	2.11	2.18	2.13	2.18	2.25	2.32	2.24	2.29	2.36	2.44	2.33	2.39	2.46	2.55	2.42	2.47	2.55	2.64	
		Amps	9.0	9.2	9.4	9.7	9.6	9.8	10.0	10.3	10.3	10.5	10.7	11.1	10.8	11.0	11.3	11.7	11.4	11.6	11.9	12.3	11.9	12.2	12.5	12.9	
80		1125	Hi PR	228	245	259	270	256	275	291	303	291	313	331	345	331	357	377	393	373	401	424	442	412	443	468	488
			Lo PR	106	113	124	132	113	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165
		1000	MBh	26.8	27.4	29.3	31.3	26.2	26.8	28.6	30.6	25.6	26.1	27.9	29.8	24.9	25.5	27.2	29.1	23.7	24.2	25.9	27.7	21.9	22.4	24.0	25.6
			S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.94	0.76	0.57	1.01	0.94	0.77	0.57
	875	ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	15	
		kW	1.82	1.86	1.91	1.97	1.96	2.00	2.06	2.13	2.08	2.12	2.19	2.26	2.18	2.23	2.31	2.38	2.28	2.33	2.40	2.48	2.35	2.41	2.49	2.57	
	80	1125	Amps	8.9	9.0	9.2	9.5	9.4	9.6	9.8	10.1	10.0	10.2	10.5	10.8	10.6	10.8	11.1	11.4	11.1	11.3	11.7	12.0	11.7	11.9	12.2	12.6
			Hi PR	221	238	251	262	248	267	282	294	282	304	321	335	322	346	365	381	362	389	411	429	400	430	454	474
		1000	Lo PR	103	110	120	128	109	116	127	135	113	121	132	140	119	127	138	147	125	133	145	154	129	137	150	160
			MBh	30.4	31.0	32.5	34.7	29.7	30.3	31.7	33.9	29.0	29.6	31.0	33.1	28.3	28.9	30.2	32.3	26.9	27.4	28.7	30.6	24.9	25.4	26.6	28.4
875		S/T	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	1.00	0.81	
		ΔT	25	24	23	20	24	25	23	20	24	24	23	20	23	24	24	20	22	22	23	20	20	21	22	19	
85		1125	kW	1.89	1.93	1.99	2.06	2.04	2.08	2.15	2.22	2.16	2.21	2.28	2.36	2.28	2.33	2.40	2.48	2.37	2.43	2.51	2.59	2.46	2.51	2.59	2.68
			Amps	9.2	9.3	9.6	9.9	9.7	9.9	10.2	10.5	10.4	10.6	10.9	11.2	11.0	11.2	11.5	11.9	11.6	11.8	12.1	12.5	12.1	12.4	12.7	13.1
		1000	Hi PR	233	250	264	276	261	281	297	309	297	319	337	352	338	364	384	401	380	409	432	451	420	452	478	498
			Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	153	162	136	144	158	168
	875	MBh	29.6	30.1	31.6	33.7	28.9	29.4	30.8	32.9	28.2	28.7	30.1	32.1	27.5	28.0	29.4	31.3	26.1	26.6	27.9	29.7	24.2	24.7	25.8	27.6	
		S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77	
	85	1125	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	25	26	25	21	24	24	24	21	22	23	23	20
			kW	1.88	1.92	1.98	2.04	2.02	2.06	2.13	2.20	2.15	2.19	2.26	2.34	2.26	2.31	2.38	2.46	2.35	2.41	2.48	2.57	2.44	2.49	2.57	2.66
		1000	Amps	9.1	9.3	9.5	9.8	9.7	9.9	10.1	10.4	10.3	10.5	10.8	11.1	10.9	11.1	11.4	11.8	11.5	11.7	12.0	12.4	12.0	12.3	12.6	13.0
			Hi PR	230	248	262	273	258	278	294	306	294	316	334	348	335	360	380	397	377	405	428	446	416	448	473	493
875		Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166	
		MBh	27.3	27.8	29.1	31.1	26.6	27.2	28.4	30.3	26.0	26.5	27.8	29.6	25.4	25.9	27.1	28.9	24.1	24.6	25.7	27.5	22.3	22.8	23.8	25.4	
80		S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75	
		ΔT	26	26	24	21	27	26	25	21	27	26	25	21	27	26	25	22	25	26	25	21	23	24	23	20	
85		1125	kW	1.83	1.87	1.93	1.99	1.97	2.01	2.08	2.14	2.09	2.14	2.21	2.28	2.20	2.25	2.32	2.40	2.29	2.35	2.42	2.50	2.37	2.43	2.51	2.59
			Amps	8.9	9.1	9.3	9.6	9.5	9.6	9.9	10.2	10.1	10.3	10.6	10.9	10.7	10.9	11.2	11.5	11.2	11.4	11.7	12.1	11.8	12.0	12.3	12.7
	1000	Hi PR	223	240	254	265	251	270	285	297	285	307	324	338	325	349	369	385	365	393	415	433	404	434	459	478	
		Lo PR	104	111	121	129	110	117	128	136	115	122	133	142	120	128	140	149	126	134	146	156	130	139	151	161	

IDB	Airflow	Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1125	MBh	29.9	30.6	32.7	34.9	29.2	29.9	31.9	34.1	28.5	29.2	31.1	33.3	27.8	28.4	30.4	32.5	26.4	27.0	28.9	30.9	24.5	25.0	26.7	28.6	
		S/T	0.95	0.89	0.73	0.54	1.00	0.93	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.84	0.62	
	1000	ΔT	23	22	19	16	24	23	20	16	23	23	20	16	23	23	20	16	22	22	20	16	22	20	18	15	
		kW	1.88	1.92	1.98	2.04	2.02	2.06	2.13	2.20	2.15	2.19	2.26	2.34	2.26	2.31	2.38	2.46	2.35	2.41	2.48	2.57	2.44	2.49	2.57	2.66	
	875	Amps	9.1	9.3	9.5	9.8	9.7	9.9	10.1	10.4	10.3	10.5	10.8	11.1	10.9	11.1	11.4	11.8	11.5	11.7	12.0	12.4	12.0	12.3	12.6	13.0	
		Hi PR	230	248	262	273	258	278	294	306	294	316	334	348	335	360	380	397	377	405	428	446	416	448	473	493	
	80	1125	Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166
			MBh	29.0	29.7	31.7	33.9	28.4	29.0	31.0	33.1	27.7	28.3	30.2	32.3	27.0	27.6	29.5	31.5	25.7	26.2	28.0	30.0	23.8	24.3	26.0	27.8
		1000	S/T	0.91	0.85</																						

# EXPANDED COOLING DATA — WGGE4537A090M

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	MBh	34.4	35.7	39.1	-	33.6	34.8	38.2	-	32.8	34.0	37.2	-	32.0	33.2	36.3	-	30.4	31.5	34.5	-	28.2	29.2	32.0	-	
	S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-	
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-	
	1125	KW	2.29	2.34	2.41	-	2.47	2.52	2.60	-	2.63	2.68	2.77	-	2.77	2.83	2.92	-	2.88	2.95	3.05	-	2.99	3.06	3.16	-
	Amps	11.0	11.2	11.5	-	11.7	11.9	12.3	-	12.5	12.8	13.2	-	13.3	13.5	13.9	-	14.0	14.3	14.7	-	14.7	15.0	15.5	-	
	Hi PR	235	253	267	-	264	284	300	-	300	323	341	-	342	368	389	-	385	414	437	-	425	458	483	-	
	Lo PR	104	111	121	-	110	117	128	-	115	122	133	-	120	128	140	-	126	134	147	-	131	139	152	-	
	MBh	34.1	35.3	38.7	-	33.3	34.5	37.8	-	32.5	33.7	36.9	-	31.7	32.8	36.0	-	30.1	31.2	34.2	-	27.9	28.9	31.7	-	
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	
	ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-	
1055	KW	2.28	2.33	2.41	-	2.46	2.51	2.60	-	2.62	2.68	2.77	-	2.76	2.82	2.92	-	2.88	2.94	3.04	-	2.98	3.05	3.15	-	
	Amps	10.9	11.2	11.5	-	11.7	11.9	12.2	-	12.5	12.8	13.1	-	13.2	13.5	13.9	-	14.0	14.3	14.7	-	14.7	15.0	15.4	-	
	Hi PR	235	253	267	-	263	283	299	-	299	322	340	-	341	367	388	-	384	413	436	-	424	456	482	-	
	Lo PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-	
	MBh	31.4	32.6	35.7	-	30.7	31.8	34.9	-	30.0	31.1	34.0	-	29.2	30.3	33.2	-	27.8	28.8	31.5	-	25.7	26.7	29.2	-	
	S/T	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.64	0.44	-	0.77	0.64	0.44	-	
	ΔT	22	19	15	-	22	19	15	-	22	19	15	-	23	20	15	-	22	19	15	-	21	18	14	-	
	875	KW	2.23	2.27	2.35	-	2.40	2.45	2.53	-	2.55	2.61	2.70	-	2.69	2.75	2.84	-	2.80	2.87	2.96	-	2.90	2.97	3.07	-
		Amps	10.7	10.9	11.2	-	11.4	11.6	11.9	-	12.2	12.5	12.8	-	12.9	13.2	13.6	-	13.6	13.9	14.3	-	14.3	14.6	15.1	-
		Hi PR	228	245	259	-	255	275	290	-	290	313	330	-	331	356	376	-	372	401	423	-	411	443	467	-
Lo PR		101	107	117	-	107	114	124	-	111	118	129	-	117	124	135	-	122	130	142	-	126	134	147	-	

1125	MBh	35.0	36.0	39.0	41.8	34.2	35.2	38.1	40.9	33.4	34.3	37.2	39.9	32.5	33.5	36.3	38.9	30.9	31.8	34.5	37.0	28.6	29.5	31.9	34.3	
	S/T	0.80	0.72	0.54	0.35	0.83	0.75	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.92	0.83	0.63	0.40	
	ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11	
	1055	KW	2.31	2.36	2.43	2.51	2.49	2.54	2.63	2.71	2.65	2.71	2.80	2.89	2.79	2.85	2.95	3.05	2.91	2.98	3.08	3.18	3.01	3.08	3.19	3.30
		Amps	11.0	11.3	11.6	11.9	11.8	12.0	12.4	12.7	12.6	12.9	13.3	13.7	13.4	13.7	14.0	14.5	14.1	14.4	14.8	15.3	14.8	15.2	15.6	16.1
		Hi PR	238	256	270	282	267	287	303	316	303	327	345	360	346	372	393	410	389	418	442	461	430	462	488	509
		Lo PR	106	112	123	131	111	119	129	138	116	123	135	143	122	129	141	151	128	136	148	158	132	140	153	163
		MBh	34.6	35.7	38.6	41.4	33.8	34.8	37.7	40.5	33.0	34.0	36.8	39.5	32.2	33.2	35.9	38.5	30.6	31.5	34.1	36.6	28.4	29.2	31.6	33.9
		S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.37	0.87	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39
		ΔT	24	22	18	12	24	22	18	13	24	22	18	13	24	22	18	13	24	22	18	12	22	21	17	12
875		KW	2.30	2.35	2.43	2.51	2.48	2.54	2.62	2.71	2.64	2.70	2.79	2.88	2.78	2.85	2.94	3.04	2.90	2.97	3.07	3.17	3.01	3.07	3.18	3.29
		Amps	11.0	11.2	11.5	11.9	11.8	12.0	12.3	12.7	12.6	12.9	13.2	13.7	13.3	13.6	14.0	14.5	14.1	14.4	14.8	15.3	14.8	15.1	15.6	16.1
		Hi PR	237	255	269	281	266	286	302	315	303	326	344	359	345	371	392	408	388	417	440	459	428	461	487	508
	Lo PR	105	112	122	130	111	118	129	137	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163	
	MBh	32.0	32.9	35.6	38.2	31.2	32.2	34.8	37.3	30.5	31.4	34.0	36.5	29.7	30.6	33.1	35.6	28.3	29.1	31.5	33.8	26.2	26.9	29.2	31.3	
	S/T	0.76	0.68	0.51	0.33	0.79	0.71	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.75	0.56	0.36	0.87	0.77	0.59	0.38	0.87	0.78	0.59	0.38	
	ΔT	26	24	19	13	26	24	20	13	26	24	20	13	26	24	20	14	26	24	19	13	24	22	18	13	
	75	KW	2.24	2.29	2.37	2.44	2.42	2.47	2.55	2.64	2.57	2.63	2.72	2.81	2.71	2.77	2.87	2.96	2.83	2.89	2.99	3.09	2.93	3.00	3.10	3.20
		Amps	10.8	11.0	11.3	11.6	11.5	11.7	12.0	12.4	12.3	12.6	12.9	13.3	13.0	13.3	13.7	14.1	13.7	14.0	14.4	14.9	14.4	14.8	15.2	15.7
		Hi PR	230	247	261	273	258	278	293	306	293	316	333	348	334	360	380	396	376	405	427	446	415	447	472	492
Lo PR		102	109	119	126	108	115	125	133	112	119	130	139	118	125	137	146	123	131	143	153	128	136	148	158	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Design Subcooling, 10° F @ liquid access fitting connection AHR1 95 test conditions;  
 Superheat 6° F @ compressor suction access fitting connection.

EXPANDED COOLING DATA — WGGE4537A090M (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
<b>80</b>	<b>1125</b>	MBh	35.6	36.4	38.9	41.6	34.8	35.5	38.0	40.6	33.9	34.7	37.1	39.6	33.1	33.8	36.2	38.7	31.5	32.2	34.4	36.7	29.1	29.8	31.8	34.0
		S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.53	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58
		ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	22	17	24	23	20	16
		kW	2.32	2.37	2.45	2.53	2.51	2.56	2.65	2.74	2.67	2.73	2.82	2.92	2.81	2.88	2.97	3.08	2.93	3.00	3.10	3.21	3.04	3.11	3.22	3.33
		Amps	11.1	11.3	11.7	12.0	11.9	12.1	12.4	12.8	12.7	13.0	13.4	13.8	13.5	13.8	14.2	14.6	14.2	14.5	15.0	15.4	15.0	15.3	15.7	16.3
		Hi-PR	240	258	273	285	269	290	306	319	306	330	348	363	349	376	397	414	393	423	446	465	434	467	493	514
	Lo-PR	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165	
	MBh	35.3	36.0	38.5	41.1	34.4	35.2	37.6	40.2	33.6	34.3	36.7	39.2	32.8	33.5	35.8	38.3	31.2	31.8	34.0	36.4	28.9	29.5	31.5	33.7	
	S/T	0.87	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.99	0.92	0.75	0.56	0.99	0.93	0.76	0.57	
	ΔT	27	25	22	18	27	26	22	18	27	26	22	18	27	26	23	18	27	26	22	18	25	24	21	17	
	kW	2.32	2.37	2.45	2.53	2.50	2.56	2.64	2.73	2.66	2.72	2.81	2.91	2.81	2.87	2.97	3.07	2.93	2.99	3.10	3.20	3.03	3.10	3.21	3.32	
	Amps	11.1	11.3	11.6	12.0	11.8	12.1	12.4	12.8	12.7	13.0	13.3	13.8	13.4	13.7	14.1	14.6	14.2	14.5	14.9	15.4	14.9	15.2	15.7	16.2	
Hi-PR	239	258	272	284	269	289	305	318	306	329	347	362	348	375	396	413	392	421	445	464	433	466	492	513		
Lo-PR	106	113	123	131	112	119	130	139	117	124	136	144	123	130	142	152	128	137	149	159	133	141	154	164		
MBh	32.5	33.2	35.5	38.0	31.8	32.5	34.7	37.1	31.0	31.7	33.9	36.2	30.3	30.9	33.0	35.3	28.8	29.4	31.4	33.6	26.6	27.2	29.1	31.1		
S/T	0.83	0.78	0.64	0.48	0.86	0.81	0.66	0.49	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.96	0.90	0.73	0.55		
ΔT	29	27	24	19	29	28	24	19	29	28	24	19	29	28	24	19	29	28	24	19	27	26	22	18		
kW	2.26	2.31	2.39	2.46	2.44	2.49	2.57	2.66	2.60	2.65	2.74	2.83	2.73	2.80	2.89	2.99	2.85	2.92	3.02	3.12	2.95	3.02	3.12	3.23		
Amps	10.9	11.1	11.4	11.7	11.6	11.8	12.1	12.5	12.4	12.7	13.0	13.4	13.1	13.4	13.8	14.2	13.8	14.1	14.6	15.0	14.6	14.9	15.3	15.8		
Hi-PR	232	250	264	275	261	280	296	309	296	319	337	351	338	363	384	400	380	409	432	450	420	452	477	497		
Lo-PR	103	110	120	127	109	116	126	135	113	120	131	140	119	126	138	147	125	133	145	154	129	137	150	159		
<b>85</b>	<b>1125</b>	MBh	36.2	36.9	38.7	41.3	35.4	36.1	37.8	40.3	34.5	35.2	36.9	39.3	33.7	34.4	36.0	38.4	32.0	32.6	34.2	36.5	29.7	30.2	31.7	33.8
		S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.83	0.68	0.98	0.95	0.86	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75
		ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	26	27	26	22	24	25	24	21
		kW	2.34	2.39	2.47	2.55	2.53	2.58	2.67	2.76	2.69	2.75	2.84	2.94	2.84	2.90	3.00	3.10	2.96	3.03	3.13	3.24	3.07	3.14	3.24	3.36
		Amps	11.2	11.4	11.7	12.1	12.0	12.2	12.5	12.9	12.8	13.1	13.5	13.9	13.6	13.9	14.3	14.7	14.3	14.6	15.1	15.6	15.1	15.4	15.9	16.4
		Hi-PR	243	261	276	288	272	293	309	323	310	333	352	367	353	379	401	418	397	427	451	470	438	472	498	519
	Lo-PR	108	115	125	133	114	121	132	141	118	126	137	146	124	132	144	154	130	138	151	161	135	143	156	166	
	MBh	35.9	36.6	38.3	40.9	35.0	35.7	37.4	39.9	34.2	34.9	36.5	39.0	33.4	34.0	35.6	38.0	31.7	32.3	33.8	36.1	29.4	29.9	31.3	33.4	
	S/T	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74	
	ΔT	28	28	26	23	29	28	27	23	29	28	27	23	29	28	27	23	28	28	27	23	26	26	25	21	
	kW	2.34	2.39	2.47	2.55	2.52	2.58	2.66	2.75	2.69	2.75	2.84	2.93	2.83	2.89	2.99	3.09	2.95	3.02	3.12	3.23	3.06	3.13	3.23	3.35	
	Amps	11.2	11.4	11.7	12.1	11.9	12.2	12.5	12.9	12.8	13.1	13.4	13.9	13.6	13.8	14.2	14.7	14.3	14.6	15.0	15.5	15.0	15.4	15.8	16.4	
Hi-PR	242	260	275	287	271	292	308	322	309	332	351	366	352	378	399	417	395	426	449	469	437	470	497	518		
Lo-PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	160	134	143	156	166		
MBh	33.1	33.7	35.3	37.7	32.3	33.0	34.5	36.8	31.6	32.2	33.7	36.0	30.8	31.4	32.9	35.1	29.3	29.8	31.2	33.3	27.1	27.6	28.9	30.9		
S/T	0.87	0.84	0.76	0.62	0.91	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.70	1.00	0.97	0.87	0.71		
ΔT	30	30	28	24	31	30	29	25	31	30	29	25	31	31	29	25	31	30	28	25	28	28	27	23		
kW	2.28	2.33	2.40	2.48	2.46	2.51	2.60	2.68	2.62	2.68	2.77	2.86	2.76	2.82	2.91	3.01	2.88	2.94	3.04	3.15	2.98	3.05	3.15	3.26		
Amps	10.9	11.1	11.5	11.8	11.7	11.9	12.2	12.6	12.5	12.8	13.1	13.5	13.2	13.5	13.9	14.3	14.0	14.3	14.7	15.2	14.7	15.0	15.4	15.9		
Hi-PR	235	252	267	278	263	283	299	312	299	322	340	355	341	367	387	404	384	413	436	455	424	456	482	502		
Lo-PR	104	111	121	129	110	117	128	136	114	122	133	141	120	128	139	149	126	134	146	156	130	138	151	161		

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Design: Subcooling, 10° F @ liquid access fitting connection AHRI 95 test conditions;  
 Superheat 6° F @ compressor suction access fitting connection.

# EXPANDED COOLING DATA — WGGE4542A115M

IDB	Airflow	Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1350	MBh	39.7	41.1	45.1	-	38.8	40.2	44.0	-	37.8	39.2	43.0	-	36.9	38.3	41.9	-	35.1	36.4	39.8	-	32.5	33.7	36.9	-	
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.71	0.50	-	
	ΔT	20	17	13	-	20	18	13	-	21	18	13	-	21	18	14	-	21	18	13	-	19	16	12	-		
	1200	KW	2.58	2.63	2.71	-	2.77	2.83	2.92	-	2.94	3.01	3.10	-	3.09	3.16	3.26	-	3.22	3.29	3.40	-	3.33	3.41	3.52	-	
		Amps	11.3	11.6	11.9	-	12.1	12.4	12.8	-	13.1	13.4	13.8	-	13.9	14.2	14.6	-	14.7	15.0	15.5	-	15.5	15.8	16.3	-	
	1050	Hi PR	226	243	257	-	253	273	288	-	288	310	327	-	328	353	373	-	369	397	420	-	408	439	464	-	
		Lo PR	112	119	130	-	118	126	137	-	123	131	143	-	129	137	150	-	135	144	157	-	140	149	162	-	
	75	1350	MBh	38.5	39.9	43.8	-	37.6	39.0	42.7	-	36.7	38.1	41.7	-	35.8	37.1	40.7	-	34.1	35.3	38.7	-	31.5	32.7	35.8	-
			S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	19	14	-	21	18	14	-	20	17	13	-	
1200		KW	2.56	2.61	2.69	-	2.75	2.81	2.90	-	2.92	2.98	3.08	-	3.07	3.14	3.24	-	3.20	3.27	3.37	-	3.31	3.38	3.49	-	
		Amps	11.2	11.5	11.8	-	12.0	12.3	12.7	-	13.0	13.3	13.7	-	13.8	14.1	14.5	-	14.6	14.9	15.4	-	15.4	15.7	16.2	-	
1050		Hi PR	224	241	254	-	251	270	285	-	285	307	324	-	325	350	369	-	366	393	415	-	404	435	459	-	
		Lo PR	111	118	129	-	117	124	136	-	122	129	141	-	128	136	148	-	134	142	155	-	138	147	161	-	
70		1350	MBh	35.6	36.9	40.4	-	34.7	36.0	39.4	-	33.9	35.1	38.5	-	33.1	34.3	37.6	-	31.4	32.6	35.7	-	29.1	30.2	33.1	-
			S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-
		ΔT	21	18	14	-	22	19	14	-	22	19	14	-	22	19	14	-	21	19	14	-	20	17	13	-	
	1200	KW	2.50	2.55	2.63	-	2.68	2.74	2.83	-	2.85	2.91	3.00	-	2.99	3.06	3.16	-	3.12	3.19	3.29	-	3.22	3.29	3.40	-	
		Amps	11.0	11.2	11.5	-	11.8	12.0	12.4	-	12.7	12.9	13.3	-	13.4	13.7	14.1	-	14.2	14.5	15.0	-	15.0	15.3	15.8	-	
	1050	Hi PR	217	233	246	-	243	262	276	-	277	298	314	-	315	339	358	-	355	382	403	-	392	422	445	-	
		Lo PR	107	114	125	-	113	121	132	-	118	125	137	-	124	132	144	-	130	138	151	-	134	143	156	-	

75	1350	MBh	40.4	41.6	45.0	48.3	39.4	40.6	43.9	47.2	38.5	39.6	42.9	46.0	37.5	38.7	41.8	44.9	35.7	36.7	39.7	42.7	33.0	34.0	36.8	39.5	
		S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.59	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42	
	ΔT	23	21	18	12	24	22	18	12	24	22	18	12	24	22	18	12	23	22	18	12	22	20	17	11		
	1200	KW	2.60	2.65	2.73	2.82	2.79	2.85	2.94	3.04	2.97	3.03	3.13	3.23	3.12	3.19	3.29	3.40	3.25	3.32	3.43	3.54	3.36	3.44	3.55	3.67	
		Amps	11.4	11.7	12.0	12.4	12.2	12.5	12.9	13.3	13.2	13.5	13.9	14.4	14.0	14.3	14.8	15.3	14.8	15.2	15.6	16.2	15.6	16.0	16.5	17.1	
	1050	Hi PR	228	245	259	270	256	275	291	303	291	313	331	345	332	357	377	393	373	401	424	442	412	443	468	488	
		Lo PR	113	120	131	140	119	127	139	148	124	132	144	153	130	139	151	161	137	145	159	169	141	150	164	175	
	70	1350	MBh	39.2	40.3	43.7	46.9	38.3	39.4	42.7	45.8	37.4	38.5	41.6	44.7	36.5	37.5	40.6	43.6	34.6	35.7	38.6	41.4	32.1	33.0	35.7	38.4
			S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
		ΔT	24	22	18	13	25	23	19	13	25	23	19	13	25	23	19	13	24	22	18	13	23	21	17	12	
1200		KW	2.58	2.63	2.71	2.80	2.77	2.83	2.92	3.01	2.94	3.01	3.10	3.20	3.09	3.16	3.26	3.37	3.22	3.29	3.40	3.51	3.33	3.41	3.52	3.64	
		Amps	11.3	11.6	11.9	12.3	12.1	12.4	12.8	13.2	13.1	13.4	13.8	14.2	13.9	14.2	14.6	15.1	14.7	15.0	15.5	16.0	15.5	15.9	16.3	16.9	
1050		Hi PR	226	243	257	268	253	273	288	300	288	310	327	342	328	353	373	389	369	397	420	438	408	439	464	484	
		Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	162	173	
75		1350	MBh	36.2	37.2	40.3	43.3	35.3	36.4	39.4	42.3	34.5	35.5	38.4	41.2	33.6	34.6	37.5	40.2	32.0	32.9	35.6	38.2	29.6	30.5	33.0	35.4
			S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.89	0.80	0.61	0.39
		ΔT	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	23	21	17	12	
	1200	KW	2.52	2.57	2.65	2.73	2.71	2.76	2.85	2.94	2.87	2.93	3.03	3.12	3.02	3.08	3.18	3.29	3.14	3.21	3.32	3.43	3.25	3.32	3.43	3.55	
		Amps	11.1	11.3	11.6	12.0	11.8	12.1	12.5	12.9	12.8	13.0	13.4	13.9	13.5	13.8	14.3	14.8	14.3	14.6	15.1	15.6	15.1	15.4	15.9	16.5	
	1050	Hi PR	219	236	249	260	246	265	279	291	280	301	318	331	318	343	362	377	358	385	407	425	396	426	450	469	
		Lo PR	108	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Design Subcooling, 10° F @ liquid access fitting connection AHR1 95 test conditions;  
 Superheat 6° F @ compressor suction access fitting connection.

EXPANDED COOLING DATA — WGGE4542A115M (CONT.)

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1350	MBh	41.1	42.0	44.8	47.9	40.1	41.0	43.8	46.8	39.2	40.0	42.8	45.7	38.2	39.0	41.7	44.6	36.3	37.1	39.6	42.4	33.6	34.4	36.7	39.2	
		S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.74	0.55	1.00	0.93	0.75	0.56	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.61	
	ΔT	26	25	22	17	26	25	22	18	27	25	22	18	26	25	22	18	25	25	22	17	23	23	20	16		
	1200	kW	2.62	2.67	2.76	2.84	2.82	2.88	2.97	3.06	2.99	3.06	3.15	3.26	3.15	3.21	3.32	3.43	3.28	3.35	3.46	3.57	3.39	3.46	3.58	3.70	
		Amps	11.5	11.8	12.1	12.5	12.3	12.6	13.0	13.4	13.3	13.6	14.0	14.5	14.1	14.4	14.9	15.4	15.0	15.3	15.8	16.3	15.8	16.1	16.6	17.2	
	1050	Hi-PR	230	248	262	273	259	278	294	306	294	316	334	348	335	360	381	397	377	405	428	446	416	448	473	493	
		Lo-PR	114	121	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	176	
	85	1350	MBh	39.9	40.8	43.5	46.5	39.0	39.8	42.5	45.5	38.0	38.9	41.5	44.4	37.1	37.9	40.5	43.3	35.2	36.0	38.5	41.1	32.6	33.4	35.6	38.1
			S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.95	0.77	0.58	1.00	0.95	0.78	0.58
		ΔT	27	26	23	18	27	26	23	18	27	26	23	18	28	26	23	18	27	26	23	18	25	24	21	17	
1200		kW	2.60	2.65	2.73	2.82	2.79	2.85	2.94	3.04	2.97	3.03	3.13	3.23	3.12	3.19	3.29	3.40	3.25	3.32	3.43	3.54	3.36	3.44	3.55	3.67	
		Amps	11.4	11.7	12.0	12.4	12.2	12.5	12.9	13.3	13.2	13.5	13.9	14.4	14.0	14.3	14.8	15.3	14.8	15.2	15.6	16.2	15.6	16.0	16.5	17.1	
1050		Hi-PR	228	245	259	270	256	275	291	303	291	313	331	345	332	357	377	393	373	401	424	442	412	443	468	488	
		Lo-PR	113	120	131	140	119	127	139	148	124	132	144	153	130	139	151	161	137	145	159	169	141	150	164	175	
85		1350	MBh	36.8	37.6	40.2	43.0	36.0	36.7	39.3	42.0	35.1	35.9	38.3	41.0	34.2	35.0	37.4	40.0	32.5	33.2	35.5	38.0	30.1	30.8	32.9	35.2
			S/T	0.85	0.80	0.65	0.49	0.89	0.83	0.68	0.51	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.53	0.97	0.91	0.74	0.56	0.98	0.92	0.75	0.56
		ΔT	28	26	23	18	28	27	23	19	28	27	23	19	28	27	23	19	28	27	23	18	26	25	22	17	
	1200	kW	2.54	2.59	2.67	2.75	2.73	2.78	2.87	2.96	2.90	2.96	3.05	3.15	3.04	3.11	3.21	3.31	3.17	3.24	3.34	3.45	3.28	3.35	3.46	3.58	
		Amps	11.1	11.4	11.7	12.1	11.9	12.2	12.6	13.0	12.9	13.1	13.5	14.0	13.7	14.0	14.4	14.9	14.5	14.8	15.2	15.8	15.2	15.6	16.1	16.6	
	1050	Hi-PR	221	238	251	262	248	267	282	294	282	304	321	335	322	346	365	381	362	389	411	429	400	430	454	474	
		Lo-PR	110	117	127	136	116	123	134	143	120	128	140	149	126	134	147	156	132	141	154	164	137	146	159	169	
	85	1350	MBh	41.8	42.6	44.6	47.6	40.8	41.6	43.6	46.5	39.9	40.6	42.5	45.4	38.9	39.6	41.5	44.3	36.9	37.6	39.4	42.1	34.2	34.9	36.5	39.0
			S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.78	1.00	1.00	0.97	0.79
		ΔT	28	27	26	22	28	28	26	23	27	28	26	23	26	27	26	23	25	26	26	22	23	24	24	21	
1200		kW	2.64	2.69	2.78	2.87	2.84	2.90	2.99	3.09	3.02	3.08	3.18	3.28	3.17	3.24	3.35	3.46	3.30	3.38	3.49	3.60	3.42	3.49	3.61	3.73	
		Amps	11.6	11.9	12.2	12.6	12.4	12.7	13.1	13.5	13.4	13.7	14.1	14.6	14.2	14.6	15.0	15.5	15.1	15.4	15.9	16.5	15.9	16.3	16.8	17.4	
1050		Hi-PR	233	250	264	276	261	281	297	309	297	320	337	352	338	364	384	401	380	409	432	451	420	452	478	498	
		Lo-PR	115	123	134	143	122	130	141	151	127	135	147	157	133	141	154	164	139	148	162	172	144	153	167	178	
85		1350	MBh	40.6	41.4	43.3	46.2	39.6	40.4	42.3	45.1	38.7	39.4	41.3	44.1	37.7	38.5	40.3	43.0	35.9	36.6	38.3	40.8	33.2	33.9	35.5	37.8
			S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
		ΔT	29	28	27	23	29	29	27	24	29	29	27	24	29	29	27	24	29	28	27	23	25	26	25	22	
	1200	kW	2.62	2.67	2.76	2.84	2.82	2.88	2.97	3.06	2.99	3.06	3.15	3.26	3.15	3.21	3.32	3.43	3.28	3.35	3.46	3.57	3.39	3.46	3.58	3.70	
		Amps	11.5	11.8	12.1	12.5	12.3	12.6	13.0	13.4	13.3	13.6	14.0	14.5	14.1	14.4	14.9	15.4	15.0	15.3	15.8	16.3	15.8	16.1	16.6	17.2	
	1050	Hi-PR	230	248	262	273	259	278	294	306	294	316	334	348	335	360	381	397	377	405	428	446	416	448	473	493	
		Lo-PR	114	121	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	176	
	85	1350	MBh	37.5	38.2	40.0	42.7	36.6	37.3	39.1	41.7	35.7	36.4	38.1	40.7	34.8	35.5	37.2	39.7	33.1	33.7	35.3	37.7	30.7	31.3	32.7	34.9
			S/T	0.90	0.86	0.78	0.63	0.93	0.90	0.81	0.66	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.90	0.73
		ΔT	29	29	27	24	30	29	28	24	30	29	28	24	30	29	28	24	30	29	27	24	27	27	26	22	
1200		kW	2.56	2.61	2.69	2.77	2.75	2.81	2.89	2.99	2.92	2.98	3.08	3.18	3.07	3.13	3.24	3.34	3.20	3.27	3.37	3.48	3.31	3.38	3.49	3.61	
		Amps	11.2	11.5	11.8	12.2	12.0	12.3	12.7	13.1	13.0	13.3	13.6	14.1	13.8	14.1	14.5	15.0	14.6	14.9	15.4	15.9	15.4	15.7	16.2	16.8	
1050		Hi-PR	223	240	254	265	251	270	285	297	285	307	324	338	325	350	369	385	365	393	415	433	404	434	459	479	
		Lo-PR	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	165	138	147	161	171	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Design: Subcooling, 10° F @ liquid access fitting connection AHRI 95 test conditions;  
 Superheat 6° F @ compressor suction access fitting connection.

# EXPANDED COOLING DATA — WGGE4549A115M — SINGLE STAGE

IDB	Airflow	Outdoor Ambient Temperature																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	45.2	46.8	51.3	-	44.1	45.7	50.1	-	43.1	44.6	48.9	-	42.0	43.5	47.7	-	39.9	41.4	45.3	-	37.0	38.3	42.0	-
	S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-
	ΔT	27	24	18	-	28	24	18	-	28	24	18	-	28	24	18	-	28	24	18	-	26	22	17	-
	kW	2.09	2.14	2.20	-	2.25	2.30	2.37	-	2.39	2.44	2.51	-	2.51	2.56	2.64	-	2.61	2.67	2.75	-	2.70	2.76	2.85	-
	Amps	8.6	8.8	9.0	-	9.2	9.4	9.7	-	9.9	10.1	10.4	-	10.5	10.7	11.0	-	11.1	11.3	11.6	-	11.6	11.9	12.3	-
	Hi PR	212	228	241	-	238	256	270	-	270	291	307	-	308	331	350	-	346	372	393	-	382	412	435	-
	Lo PR	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-	141	150	164	-
	MBh	44.7	46.3	50.8	-	43.7	45.3	49.6	-	42.6	44.2	48.4	-	41.6	43.1	47.2	-	39.5	41.0	44.9	-	36.6	37.9	41.6	-
	S/T	0.73	0.61	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.48	-	0.84	0.70	0.49	-
	ΔT	29	25	19	-	29	25	19	-	29	25	19	-	29	25	19	-	29	25	19	-	27	23	18	-
kW	2.09	2.13	2.20	-	2.24	2.29	2.36	-	2.38	2.43	2.51	-	2.50	2.55	2.64	-	2.60	2.66	2.75	-	2.69	2.75	2.84	-	
Amps	8.6	8.8	9.0	-	9.2	9.4	9.6	-	9.9	10.1	10.4	-	10.4	10.7	11.0	-	11.0	11.3	11.6	-	11.6	11.9	12.2	-	
Hi PR	211	227	240	-	237	255	269	-	269	290	306	-	307	330	349	-	345	371	392	-	381	410	433	-	
Lo PR	113	120	131	-	119	126	138	-	124	131	143	-	130	138	151	-	136	145	158	-	141	150	163	-	
MBh	42.5	44.0	48.2	-	41.5	43.0	47.1	-	40.5	42.0	46.0	-	39.5	41.0	44.9	-	37.5	38.9	42.6	-	34.8	36.0	39.5	-	
S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	
ΔT	30	26	20	-	30	26	20	-	30	26	20	-	30	26	20	-	30	26	20	-	28	24	18	-	
kW	2.06	2.10	2.16	-	2.21	2.25	2.32	-	2.34	2.39	2.47	-	2.46	2.51	2.59	-	2.56	2.62	2.70	-	2.65	2.71	2.79	-	
Amps	8.5	8.6	8.9	-	9.0	9.2	9.5	-	9.7	9.9	10.2	-	10.3	10.5	10.8	-	10.9	11.1	11.4	-	11.4	11.7	12.0	-	
Hi PR	207	223	235	-	232	250	264	-	264	284	300	-	301	324	342	-	338	364	384	-	374	402	425	-	
Lo PR	110	117	128	-	116	124	135	-	121	129	141	-	127	135	148	-	133	142	155	-	138	147	160	-	

75	MBh	45.9	47.3	51.2	54.9	44.9	46.2	50.0	53.7	43.8	45.1	48.8	52.4	42.7	44.0	47.6	51.1	40.6	41.8	45.2	48.5	37.6	38.7	41.9	45.0
	S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.39	0.93	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.87	0.66	0.43
	ΔT	32	29	24	17	32	30	24	17	32	30	24	17	32	30	24	17	32	29	24	17	30	27	22	16
	kW	2.11	2.15	2.22	2.29	2.27	2.31	2.39	2.46	2.41	2.46	2.53	2.62	2.53	2.58	2.66	2.75	2.63	2.69	2.78	2.87	2.72	2.78	2.87	2.97
	Amps	8.7	8.8	9.1	9.4	9.3	9.5	9.7	10.0	10.0	10.2	10.5	10.8	10.6	10.8	11.1	11.5	11.2	11.4	11.7	12.1	11.7	12.0	12.4	12.8
	Hi PR	214	230	243	253	240	258	273	284	273	294	310	323	311	334	353	368	350	376	397	414	386	416	439	458
	Lo PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	153	163	138	147	160	170	143	152	166	176
	MBh	45.5	46.8	50.7	54.4	44.4	45.7	49.5	53.1	43.4	44.6	48.3	51.9	42.3	43.6	47.1	50.6	40.2	41.4	44.8	48.1	37.2	38.3	41.5	44.5
	S/T	0.84	0.75	0.57	0.36	0.87	0.77	0.59	0.38	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42
	ΔT	33	31	25	17	34	31	25	18	34	31	25	18	34	31	25	18	33	31	25	17	31	29	24	16
kW	2.11	2.15	2.21	2.28	2.26	2.31	2.38	2.46	2.40	2.45	2.53	2.61	2.52	2.58	2.66	2.74	2.63	2.68	2.77	2.86	2.71	2.77	2.86	2.96	
Amps	8.7	8.8	9.1	9.4	9.2	9.4	9.7	10.0	9.9	10.1	10.4	10.8	10.5	10.8	11.1	11.5	11.1	11.4	11.7	12.1	11.7	12.0	12.3	12.8	
Hi PR	213	229	242	253	239	257	272	284	272	293	309	322	310	333	352	367	349	375	396	413	385	415	438	457	
Lo PR	114	121	132	141	120	128	139	149	125	133	145	154	131	139	152	162	137	146	160	170	142	151	165	176	
MBh	43.2	44.5	48.1	51.7	42.2	43.4	47.0	50.5	41.2	42.4	45.9	49.3	40.2	41.4	44.8	48.1	38.2	39.3	42.5	45.7	35.4	36.4	39.4	42.3	
S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40	
ΔT	34	32	26	18	35	32	26	18	35	32	26	18	35	32	26	18	35	32	26	18	32	30	24	17	
kW	2.07	2.12	2.18	2.25	2.23	2.27	2.34	2.42	2.36	2.41	2.49	2.57	2.48	2.53	2.61	2.70	2.58	2.64	2.72	2.81	2.67	2.73	2.82	2.91	
Amps	8.5	8.7	8.9	9.2	9.1	9.3	9.6	9.9	9.8	10.0	10.3	10.6	10.4	10.6	10.9	11.3	10.9	11.2	11.5	11.9	11.5	11.8	12.1	12.5	
Hi PR	209	225	237	248	234	252	266	278	267	287	303	316	304	327	345	360	342	368	388	405	377	406	429	447	
Lo PR	111	119	129	138	118	125	137	146	122	130	142	151	128	137	149	159	135	143	156	167	139	148	162	172	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Design Subcooling, 12° F @ liquid access fitting connection AHR1 95 test conditions;  
 Superheat 12° F @ compressor suction access fitting connection.



EXPANDED COOLING DATA — WGGE4549A115M — SINGLE STAGE (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
<b>80</b>	<b>1135</b>	MBh	46.7	47.8	51.0	54.6	45.7	46.7	49.8	53.3	44.6	45.5	48.7	52.0	43.5	44.4	47.5	50.7	41.3	42.2	45.1	48.2	38.3	39.1	41.8	44.7
		S/T	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
		ΔT	35	34	29	24	36	34	30	24	36	34	30	24	35	35	30	24	33	34	30	24	31	32	28	22
		kW	2.13	2.17	2.24	2.31	2.29	2.33	2.41	2.48	2.42	2.48	2.55	2.64	2.55	2.60	2.69	2.77	2.65	2.71	2.80	2.89	2.74	2.80	2.90	2.99
		Amps	8.7	8.9	9.2	9.5	9.3	9.5	9.8	10.1	10.0	10.3	10.6	10.9	10.6	10.9	11.2	11.6	11.3	11.5	11.8	12.2	11.8	12.1	12.5	12.9
		Hi-PR	216	232	245	256	242	261	275	287	276	297	313	327	314	338	357	372	353	380	401	419	390	420	443	463
	Lo-PR	115	123	134	142	122	129	141	150	126	135	147	156	133	141	154	164	139	148	162	172	144	153	167	178	
	MBh	46.3	47.3	50.5	54.0	45.2	46.2	49.4	52.8	44.1	45.1	48.2	51.5	43.1	44.0	47.0	50.2	40.9	41.8	44.7	47.7	37.9	38.7	41.4	44.2	
	S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.56	1.00	0.94	0.77	0.57	1.00	0.98	0.80	0.60	1.00	0.99	0.80	0.60	
	ΔT	37	36	31	25	38	36	31	25	38	36	31	25	38	36	32	25	36	36	31	25	33	33	29	23	
	kW	2.12	2.17	2.23	2.30	2.28	2.33	2.40	2.48	2.42	2.47	2.55	2.63	2.54	2.60	2.68	2.77	2.65	2.70	2.79	2.88	2.74	2.80	2.89	2.98	
	Amps	8.7	8.9	9.1	9.4	9.3	9.5	9.8	10.1	10.0	10.2	10.5	10.9	10.6	10.8	11.2	11.5	11.2	11.5	11.8	12.2	11.8	12.1	12.4	12.9	
Hi-PR	215	232	245	255	242	260	275	286	275	296	312	326	313	337	356	371	352	379	400	417	389	419	442	461		
Lo-PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	154	164	139	148	161	172	144	153	167	178		
MBh	44.0	44.9	48.0	51.3	42.9	43.9	46.9	50.1	41.9	42.8	45.8	48.9	40.9	41.8	44.7	47.7	38.9	39.7	42.4	45.3	36.0	36.8	39.3	42.0		
S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.94	0.76	0.57	1.01	0.94	0.77	0.57		
ΔT	38	37	32	26	39	37	32	26	39	37	32	26	39	37	33	26	37	37	32	26	36	35	30	24		
kW	2.09	2.13	2.20	2.26	2.24	2.29	2.36	2.44	2.38	2.43	2.51	2.59	2.50	2.55	2.64	2.72	2.60	2.66	2.75	2.84	2.69	2.75	2.84	2.93		
Amps	8.6	8.8	9.0	9.3	9.2	9.4	9.6	9.9	9.9	10.1	10.4	10.7	10.4	10.7	11.0	11.4	11.0	11.3	11.6	12.0	11.6	11.9	12.2	12.7		
Hi-PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	349	364	345	371	392	409	381	410	433	452		
Lo-PR	113	120	131	139	119	126	138	147	124	131	143	153	130	138	151	161	136	145	158	168	141	150	163	174		
<b>85</b>	<b>1135</b>	MBh	47.6	48.5	50.8	54.2	46.5	47.4	49.6	52.9	45.3	46.2	48.4	51.6	44.2	45.1	47.2	50.4	42.0	42.8	44.9	47.9	38.9	39.7	41.6	44.3
		S/T	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79
		ΔT	38	37	35	30	38	38	36	31	37	37	36	31	36	37	36	31	34	35	35	31	32	32	33	29
		kW	2.14	2.19	2.25	2.32	2.30	2.35	2.42	2.50	2.44	2.50	2.58	2.66	2.57	2.62	2.71	2.80	2.67	2.73	2.82	2.91	2.77	2.83	2.92	3.02
		Amps	8.8	9.0	9.2	9.5	9.4	9.6	9.9	10.2	10.1	10.3	10.6	11.0	10.7	11.0	11.3	11.7	11.3	11.6	11.9	12.3	11.9	12.2	12.6	13.0
		Hi-PR	218	235	248	259	245	263	278	290	278	300	316	330	317	341	360	376	357	384	405	423	394	424	448	467
	Lo-PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	141	150	163	174	145	155	169	180	
	MBh	47.1	48.0	50.3	53.6	46.0	46.9	49.1	52.4	44.9	45.8	47.9	51.1	43.8	44.7	46.8	49.9	41.6	42.4	44.4	47.4	38.5	39.3	41.2	43.9	
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	
	ΔT	40	39	37	32	40	39	37	32	39	39	37	32	38	39	38	33	36	37	37	32	34	34	35	30	
	kW	2.14	2.18	2.25	2.32	2.30	2.35	2.42	2.50	2.44	2.49	2.57	2.65	2.56	2.62	2.70	2.79	2.67	2.73	2.81	2.91	2.76	2.82	2.91	3.01	
	Amps	8.8	9.0	9.2	9.5	9.4	9.6	9.9	10.2	10.1	10.3	10.6	11.0	10.7	10.9	11.3	11.6	11.3	11.6	11.9	12.3	11.9	12.2	12.5	13.0	
Hi-PR	218	234	247	258	244	263	277	289	278	299	315	329	316	340	359	375	356	383	404	422	393	423	447	466		
Lo-PR	116	123	135	143	123	130	142	152	127	135	148	157	134	142	155	165	140	149	163	173	145	154	168	179		
MBh	44.7	45.6	47.8	51.0	43.7	44.5	46.6	49.8	42.7	43.5	45.5	48.6	41.6	42.4	44.4	47.4	39.5	40.3	42.2	45.0	36.6	37.3	39.1	41.7		
S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75		
ΔT	41	40	38	33	41	41	38	33	41	41	39	33	41	41	39	34	39	40	38	33	36	37	36	31		
kW	2.11	2.15	2.21	2.28	2.26	2.31	2.38	2.46	2.40	2.45	2.53	2.61	2.52	2.58	2.66	2.74	2.62	2.68	2.77	2.86	2.71	2.77	2.86	2.96		
Amps	8.6	8.8	9.1	9.4	9.2	9.4	9.7	10.0	9.9	10.1	10.4	10.8	10.5	10.8	11.1	11.4	11.1	11.4	11.7	12.1	11.7	12.0	12.3	12.8		
Hi-PR	213	229	242	253	239	257	272	283	272	293	309	322	310	333	352	367	349	375	396	413	385	414	438	456		
Lo-PR	114	121	132	141	120	128	139	149	125	133	145	154	131	139	152	162	137	146	160	170	142	151	165	176		

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Design: Subcooling, 12° F @ liquid access fitting connection AHRI 95 test conditions;  
 Superheat 12° F @ compressor suction access fitting connection.

# EXPANDED COOLING DATA — WGGE4549A115M — TWO STAGE

IDB	Airflow	Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1475	MBh	46.1	47.7	52.3	-	45.0	46.6	51.1	-	43.9	45.5	49.9	-	42.8	44.4	48.7	-	40.7	42.2	46.2	-	37.7	39.1	42.8	-	
		S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	20	17	13	-	
	1300	KW	3.11	3.18	3.28	-	3.35	3.42	3.53	-	3.56	3.64	3.76	-	3.75	3.83	3.96	-	3.91	3.99	4.13	-	4.04	4.13	4.27	-	
		Amps	12.9	13.1	13.5	-	13.8	14.1	14.5	-	14.8	15.2	15.6	-	15.8	16.1	16.6	-	16.7	17.1	17.6	-	17.6	18.0	18.5	-	
		Hi/PR	230	247	261	-	258	277	293	-	293	315	333	-	334	359	379	-	375	404	427	-	415	446	471	-	
	1125	Lo/PR	108	115	125	-	114	121	132	-	118	126	138	-	124	132	145	-	130	139	151	-	135	144	157	-	
		MBh	44.7	46.3	50.8	-	43.7	45.3	49.6	-	42.6	44.2	48.4	-	41.6	43.1	47.2	-	39.5	41.0	44.9	-	36.6	37.9	41.6	-	
		S/T	0.69	0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.79	0.66	0.46	-	
	75	1475	ΔT	22	19	14	-	22	19	15	-	22	19	15	-	22	19	15	-	22	19	14	-	21	18	13	-
			KW	3.09	3.15	3.25	-	3.32	3.39	3.50	-	3.53	3.61	3.73	-	3.72	3.80	3.92	-	3.87	3.96	4.09	-	4.01	4.10	4.24	-
			Amps	12.8	13.0	13.4	-	13.7	14.0	14.4	-	14.7	15.0	15.5	-	15.6	16.0	16.5	-	16.5	16.9	17.4	-	17.4	17.8	18.4	-
1300		Hi/PR	227	245	258	-	255	275	290	-	290	312	330	-	330	356	375	-	372	400	422	-	411	442	467	-	
		Lo/PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-	
		MBh	41.3	42.8	46.9	-	40.3	41.8	45.8	-	39.4	40.8	44.7	-	38.4	39.8	43.6	-	36.5	37.8	41.4	-	33.8	35.0	38.4	-	
1125		S/T	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.76	0.64	0.44	-	
		ΔT	22	19	15	-	23	20	15	-	23	20	15	-	23	20	15	-	23	20	15	-	21	18	14	-	
		KW	3.01	3.08	3.17	-	3.24	3.31	3.42	-	3.45	3.52	3.63	-	3.62	3.70	3.83	-	3.78	3.86	3.99	-	3.91	4.00	4.13	-	
70		1475	Amps	12.4	12.7	13.1	-	13.3	13.6	14.0	-	14.4	14.7	15.1	-	15.2	15.6	16.0	-	16.1	16.5	17.0	-	17.0	17.4	17.9	-
			Hi/PR	221	237	251	-	247	266	281	-	281	303	320	-	321	345	364	-	361	388	410	-	398	429	453	-
			Lo/PR	104	110	120	-	109	116	127	-	114	121	132	-	120	127	139	-	125	133	145	-	130	138	150	-
	1475	MBh	46.8	48.2	52.2	56.0	45.7	47.1	51.0	54.7	44.7	46.0	49.8	53.4	43.6	44.9	48.6	52.1	41.4	42.6	46.1	49.5	38.3	39.5	42.7	45.9	
		S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.95	0.85	0.64	0.41	
		ΔT	24	22	18	13	24	22	18	13	24	22	18	13	25	23	19	13	24	22	18	13	23	21	17	12	
	1300	KW	3.14	3.20	3.30	3.41	3.38	3.45	3.56	3.68	3.59	3.67	3.79	3.92	3.78	3.86	3.99	4.12	3.94	4.03	4.16	4.30	4.08	4.17	4.31	4.46	
		Amps	13.0	13.2	13.6	14.1	13.9	14.2	14.6	15.1	15.0	15.3	15.8	16.3	15.9	16.2	16.7	17.3	16.8	17.2	17.7	18.4	17.7	18.1	18.7	19.4	
		Hi/PR	232	250	264	275	260	280	296	308	296	319	336	351	337	363	383	400	379	408	431	450	419	451	476	497	
	1125	Lo/PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	
		MBh	45.5	46.8	50.7	54.4	44.4	45.7	49.5	53.1	43.4	44.6	48.3	51.9	42.3	43.6	47.1	50.6	40.2	41.4	44.8	48.1	37.2	38.3	41.5	44.5	
		S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
75	1475	ΔT	25	23	19	13	26	24	19	13	26	24	19	13	26	24	19	13	25	23	19	13	24	22	18	12	
		KW	3.11	3.18	3.28	3.38	3.35	3.42	3.53	3.65	3.56	3.64	3.76	3.88	3.75	3.83	3.96	4.09	3.91	3.99	4.13	4.27	4.04	4.13	4.27	4.42	
		Amps	12.9	13.1	13.5	14.0	13.8	14.1	14.5	15.0	14.8	15.2	15.6	16.2	15.8	16.1	16.6	17.2	16.7	17.1	17.6	18.2	17.6	18.0	18.5	19.2	
	1300	Hi/PR	230	247	261	272	258	277	293	305	293	315	333	347	334	359	379	396	376	404	427	445	415	447	471	492	
		Lo/PR	108	115	125	134	114	121	132	141	119	126	138	147	124	132	145	154	130	139	152	161	135	144	157	167	
		MBh	42.0	43.2	46.8	50.2	41.0	42.2	45.7	49.0	40.0	41.2	44.6	47.9	39.0	40.2	43.5	46.7	37.1	38.2	41.3	44.4	34.4	35.4	38.3	41.1	
	1125	S/T	0.76	0.68	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.87	0.78	0.59	0.38	
		ΔT	26	24	20	14	26	24	20	14	26	24	20	14	26	24	20	14	26	24	20	14	24	22	18	13	
		KW	3.04	3.10	3.20	3.30	3.27	3.34	3.45	3.56	3.47	3.55	3.66	3.79	3.66	3.74	3.86	3.99	3.81	3.89	4.02	4.16	3.94	4.03	4.16	4.30	
	70	Amps	12.5	12.8	13.2	13.6	13.4	13.7	14.1	14.6	14.5	14.8	15.2	15.8	15.4	15.7	16.2	16.7	16.3	16.6	17.1	17.7	17.1	17.5	18.1	18.7	
		Hi/PR	223	240	253	264	250	269	284	296	284	306	323	337	324	348	368	384	364	392	414	432	402	433	457	477	
		Lo/PR	105	111	122	130	111	118	128	137	115	122	134	142	121	128	140	149	127	135	147	157	131	139	152	162	

IDB: Entering Indoor Dry Bulb Temperature  
 High & low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 Design: Subcooling, 12° F @ liquid access fitting connection AHR1 95 test conditions;  
 Superheat 12° F @ compressor suction access fitting connection.

EXPANDED COOLING DATA — WGGE4549A115M — TWO STAGE (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1475	MBh	47.7	48.7	52.0	55.6	46.6	47.6	50.8	54.3	45.5	46.4	49.6	53.0	44.3	45.3	48.4	51.8	42.1	43.0	46.0	49.2	39.0	39.9	42.6	45.5	
		S/T	0.90	0.85	0.69	0.52	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.79	0.59	
	ΔT	27	26	22	18	27	26	23	18	27	26	23	18	28	26	23	18	26	26	22	18	24	25	21	17		
	1300	KW	3.16	3.23	3.33	3.44	3.41	3.48	3.59	3.71	3.62	3.70	3.82	3.95	3.81	3.90	4.02	4.16	3.97	4.06	4.20	4.34	4.11	4.21	4.35	4.49	
		Amps	13.1	13.3	13.7	14.2	14.0	14.3	14.7	15.2	15.1	15.4	15.9	16.4	16.0	16.4	16.9	17.5	17.0	17.4	17.9	18.5	17.9	18.3	18.9	19.5	
	1125	MBh	46.3	47.3	50.5	54.0	45.2	46.2	49.4	52.8	44.1	45.1	48.2	51.5	43.1	44.0	47.0	50.2	40.9	41.8	44.7	47.7	37.9	38.7	41.4	44.2	
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	
	85	1475	MBh	48.5	49.4	51.8	55.2	47.4	48.3	50.6	54.0	46.2	47.1	49.4	52.7	45.1	46.0	48.2	51.4	42.9	43.7	45.8	48.8	39.7	40.5	42.4	45.2
			S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.95	0.77
		ΔT	29	28	27	23	29	28	27	23	29	29	27	23	28	29	27	23	27	27	27	23	25	25	25	22	
1300		KW	3.19	3.25	3.36	3.47	3.43	3.51	3.62	3.74	3.65	3.73	3.85	3.98	3.84	3.93	4.06	4.20	4.01	4.10	4.23	4.38	4.15	4.24	4.38	4.53	
		Amps	13.2	13.4	13.8	14.3	14.1	14.4	14.9	15.4	15.2	15.6	16.0	16.6	16.2	16.5	17.0	17.6	17.1	17.5	18.0	18.7	18.0	18.5	19.0	19.7	
1125		MBh	47.1	48.0	50.3	53.6	46.0	46.9	49.1	52.4	44.9	45.8	47.9	51.1	43.8	44.7	46.8	49.9	41.6	42.4	44.4	47.4	38.5	39.3	41.2	43.9	
		S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.90	0.73	
85		1475	MBh	47.1	48.0	50.3	53.6	46.0	46.9	49.1	52.4	44.9	45.8	47.9	51.1	43.8	44.7	46.8	49.9	41.6	42.4	44.4	47.4	38.5	39.3	41.2	43.9
			S/T	0.90	0.87	0.79	0.64	0.94	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.90	0.73
		ΔT	30	30	28	24	30	30	28	24	30	30	28	25	31	30	29	25	29	30	28	24	27	28	26	23	
	1300	KW	3.16	3.23	3.33	3.44	3.41	3.48	3.59	3.71	3.62	3.70	3.82	3.95	3.81	3.90	4.02	4.16	3.97	4.06	4.20	4.34	4.11	4.21	4.35	4.49	
		Amps	13.1	13.3	13.7	14.2	14.0	14.3	14.7	15.2	15.1	15.4	15.9	16.4	16.0	16.4	16.9	17.5	17.0	17.4	17.9	18.5	17.9	18.3	18.9	19.5	
	1125	MBh	43.5	44.3	46.4	49.5	42.5	43.3	45.3	48.4	41.4	42.2	44.2	47.2	40.4	41.2	43.2	46.0	38.4	39.2	41.0	43.7	35.6	36.3	38.0	40.5	
		S/T	0.87	0.84	0.76	0.61	0.90	0.87	0.79	0.64	0.93	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.99	0.96	0.86	0.70	1.00	0.96	0.87	0.71	
	85	1475	MBh	43.5	44.3	46.4	49.5	42.5	43.3	45.3	48.4	41.4	42.2	44.2	47.2	40.4	41.2	43.2	46.0	38.4	39.2	41.0	43.7	35.6	36.3	38.0	40.5
			S/T	0.87	0.84	0.76	0.61	0.90	0.87	0.79	0.64	0.93	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.99	0.96	0.86	0.70	1.00	0.96	0.87	0.71
		ΔT	31	30	29	25	31	31	29	25	31	31	29	25	32	31	29	25	31	31	29	25	29	29	27	23	
1300		KW	3.09	3.15	3.25	3.35	3.32	3.39	3.50	3.62	3.53	3.61	3.73	3.85	3.72	3.80	3.92	4.05	3.87	3.96	4.09	4.23	4.01	4.10	4.23	4.38	
		Amps	12.7	13.0	13.4	13.8	13.7	14.0	14.4	14.8	14.7	15.0	15.5	16.0	15.6	16.0	16.5	17.0	16.5	16.9	17.4	18.0	17.4	17.8	18.4	19.0	
1125		MBh	227	245	258	269	255	274	290	302	290	312	330	344	330	355	375	392	372	400	422	440	411	442	467	487	
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	
85		1475	MBh	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164
			S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54
		ΔT	29	28	24	19	29	28	24	20	29	28	24	20	30	28	25	20	28	27	24	19	26	25	22	18	
	1300	KW	3.06	3.13	3.22	3.33	3.30	3.37	3.47	3.59	3.50	3.58	3.70	3.82	3.69	3.77	3.89	4.02	3.84	3.93	4.06	4.19	3.98	4.06	4.20	4.34	
		Amps	12.6	12.9	13.3	13.7	13.6	13.8	14.2	14.7	14.6	14.9	15.4	15.9	15.5	15.8	16.3	16.9	16.4	16.8	17.3	17.9	17.3	17.7	18.2	18.9	
	1125	MBh	225	242	256	267	252	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	407	437	462	482	
		S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54	
	85	1475	MBh	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164
			S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54
		ΔT	29	28	24	19	29	28	24	20	29	28	24	20	30	28	25	20	28	27	24	19	26	25	22	18	
1300		KW	3.06	3.13	3.22	3.33	3.30	3.37	3.47	3.59	3.50	3.58	3.70	3.82	3.69	3.77	3.89	4.02	3.84	3.93	4.06	4.19	3.98	4.06	4.20	4.34	
		Amps	12.6	12.9	13.3	13.7	13.6	13.8	14.2	14.7	14.6	14.9	15.4	15.9	15.5	15.8	16.3	16.9	16.4	16.8	17.3	17.9	17.3	17.7	18.2	18.9	
1125		MBh	225	242	256	267	252	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	407	437	462	482	
		S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54	
85		1475	MBh	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164
			S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54
		ΔT	29	28	24	19	29	28	24	20	29	28	24	20	30	28	25	20	28	27	24	19	26	25	22	18	
	1300	KW	3.06	3.13	3.22	3.33	3.30	3.37	3.47	3.59	3.50	3.58	3.70	3.82	3.69	3.77	3.89	4.02	3.84	3.93	4.06	4.19	3.98	4.06	4.20	4.34	
		Amps	12.6	12.9	13.3	13.7	13.6	13.8	14.2	14.7	14.6	14.9	15.4	15.9	15.5	15.8	16.3	16.9	16.4	16.8	17.3	17.9	17.3	17.7	18.2	18.9	
	1125	MBh	225	242	256	267	252	272	287	299	287	309	326	340	327	352	372	388	368	396	418	436	407	437	462	482	
		S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54	
	85	1475	MBh	106	113	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164
			S/T	0.83	0.78	0.63	0.47	0.86	0.81	0.66	0.49	0.88	0.83	0.67	0.50	0.91	0.85	0.70	0.52	0.95	0.89	0.72	0.54	0.95	0.89	0.73	0.54
		ΔT	29																								

EXPANDED COOLING DATA — WGGE4560A\*\*\*M — SINGLE STAGE

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1463	MBh	40.2	41.6	45.6	-	39.2	40.7	44.6	-	38.3	39.7	43.5	-	37.4	38.7	42.4	-	35.5	36.8	40.3	-	32.9	34.1	37.3	-
		S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	
	kW	2.88	2.94	3.03	-	3.09	3.16	3.25	-	3.28	3.35	3.45	-	3.44	3.52	3.63	-	3.59	3.66	3.78	-	3.71	3.79	3.91	-	
	Amps	13.6	13.9	14.2	-	14.5	14.7	15.1	-	15.4	15.7	16.2	-	16.3	16.6	17.1	-	17.1	17.5	18.0	-	18.0	18.3	18.8	-	
	Hi PR	231	248	262	-	259	279	294	-	294	317	335	-	335	361	381	-	377	406	429	-	417	449	474	-	
	Lo PR	111	118	129	-	117	125	136	-	122	129	141	-	128	136	148	-	134	143	156	-	139	147	161	-	
	MBh	39.0	40.4	44.3	-	38.1	39.5	43.3	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	34.5	35.7	39.1	-	31.9	33.1	36.3	-	
	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	
	ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	20	18	13	-	19	17	13	-	
kW	2.86	2.92	3.00	-	3.07	3.13	3.23	-	3.25	3.32	3.43	-	3.42	3.49	3.60	-	3.56	3.63	3.75	-	3.68	3.76	3.88	-		
Amps	13.5	13.8	14.1	-	14.4	14.6	15.0	-	15.3	15.6	16.0	-	16.2	16.5	16.9	-	17.0	17.3	17.8	-	17.8	18.2	18.7	-		
Hi PR	228	246	260	-	256	276	291	-	292	314	331	-	332	357	377	-	374	402	424	-	413	444	469	-		
Lo PR	110	117	127	-	116	123	135	-	120	128	140	-	127	135	147	-	133	141	154	-	137	146	159	-		
MBh	36.0	37.3	40.9	-	35.2	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	31.8	33.0	36.1	-	29.5	30.5	33.5	-		
S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-		
ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-		
kW	2.79	2.85	2.93	-	3.00	3.06	3.15	-	3.18	3.24	3.34	-	3.34	3.41	3.51	-	3.47	3.55	3.66	-	3.59	3.67	3.78	-		
Amps	13.2	13.5	13.8	-	14.1	14.3	14.7	-	15.0	15.3	15.7	-	15.8	16.1	16.5	-	16.6	17.0	17.4	-	17.4	17.8	18.3	-		
Hi PR	222	238	252	-	249	268	283	-	283	304	321	-	322	347	366	-	362	390	412	-	400	431	455	-		
Lo PR	106	113	124	-	112	120	131	-	117	124	136	-	123	131	143	-	129	137	149	-	133	142	155	-		

75	1463	MBh	40.9	42.1	45.5	48.9	39.9	41.1	44.5	47.7	39.0	40.1	43.4	46.6	38.0	39.1	42.4	45.5	36.1	37.2	40.2	43.2	33.4	34.4	37.3	40.0
		S/T	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11	
	kW	2.90	2.96	3.05	3.15	3.12	3.18	3.28	3.38	3.31	3.38	3.48	3.59	3.47	3.55	3.66	3.78	3.62	3.69	3.81	3.94	3.74	3.82	3.94	4.07	
	Amps	13.7	14.0	14.3	14.7	14.6	14.8	15.2	15.7	15.6	15.9	16.3	16.8	16.4	16.7	17.2	17.7	17.3	17.6	18.1	18.7	18.1	18.5	19.0	19.6	
	Hi PR	233	251	265	276	262	281	297	310	297	320	338	353	339	365	385	402	381	410	433	452	421	453	479	499	
	Lo PR	112	119	130	138	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173	
	MBh	39.7	40.8	44.2	47.4	38.7	39.9	43.2	46.3	37.8	38.9	42.2	45.2	36.9	38.0	41.1	44.1	35.1	36.1	39.1	41.9	32.5	33.4	36.2	38.8	
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	
	ΔT	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	12	
kW	2.88	2.94	3.03	3.12	3.09	3.16	3.25	3.36	3.28	3.35	3.45	3.57	3.45	3.52	3.63	3.75	3.59	3.66	3.78	3.91	3.71	3.79	3.91	4.04		
Amps	13.6	13.9	14.2	14.6	14.5	14.7	15.1	15.6	15.4	15.7	16.2	16.6	16.3	16.6	17.1	17.6	17.1	17.5	18.0	18.5	18.0	18.3	18.8	19.4		
Hi PR	231	248	262	274	259	279	294	307	294	317	335	349	335	361	381	398	377	406	429	447	417	449	474	494		
Lo PR	111	118	129	137	117	125	136	145	122	129	141	151	128	136	149	158	134	143	156	166	139	147	161	171		
MBh	36.6	37.7	40.8	43.8	35.8	36.8	39.9	42.8	34.9	35.9	38.9	41.8	34.1	35.1	38.0	40.7	32.4	33.3	36.1	38.7	30.0	30.9	33.4	35.8		
S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40		
ΔT	24	22	18	12	24	22	18	13	24	22	18	13	24	22	18	13	24	22	18	13	22	21	17	12		
kW	2.81	2.87	2.96	3.05	3.02	3.08	3.18	3.28	3.20	3.27	3.37	3.48	3.36	3.43	3.54	3.66	3.50	3.57	3.69	3.81	3.62	3.70	3.81	3.94		
Amps	13.3	13.6	13.9	14.3	14.2	14.4	14.8	15.2	15.1	15.4	15.8	16.3	15.9	16.2	16.7	17.2	16.7	17.1	17.5	18.1	17.6	17.9	18.4	19.0		
Hi PR	224	241	254	265	251	270	285	298	286	307	325	339	325	350	370	386	366	394	416	434	404	435	460	479		
Lo PR	108	114	125	133	114	121	132	141	118	126	137	146	124	132	144	153	130	138	151	161	134	143	156	166		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions.  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

EXPANDED COOLING DATA — WGGE4560A\*\*\*M — SINGLE STAGE (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1463</b>	MBh	41.6	42.5	45.4	48.5	40.6	41.5	44.3	47.4	39.6	40.5	43.3	46.3	38.7	39.5	42.2	45.1	36.7	37.6	40.1	42.9	34.0	34.8	37.2	39.7
	S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63
	ΔT	25	24	21	17	26	24	21	17	25	24	21	17	24	25	21	17	23	24	21	17	21	22	20	16
	kW	2.92	2.98	3.07	3.17	3.14	3.21	3.31	3.41	3.33	3.40	3.51	3.62	3.50	3.58	3.69	3.81	3.65	3.72	3.84	3.97	3.77	3.85	3.98	4.11
	Amps	13.8	14.1	14.4	14.8	14.7	14.9	15.3	15.8	15.7	16.0	16.4	16.9	16.5	16.9	17.3	17.9	17.4	17.7	18.2	18.8	18.2	18.6	19.1	19.8
	Hi PR	235	253	268	279	264	284	300	313	300	323	341	356	342	368	389	406	385	414	437	456	425	458	483	504
	Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175
	MBh	40.4	41.3	44.1	47.1	39.4	40.3	43.1	46.0	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	35.7	36.5	39.0	41.6	33.0	33.8	36.1	38.6
	S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60
	ΔT	26	25	22	17	27	25	22	18	27	25	22	18	27	26	22	18	25	25	22	18	23	24	21	16
<b>1300</b>	kW	2.90	2.96	3.05	3.15	3.12	3.18	3.28	3.38	3.31	3.38	3.48	3.59	3.47	3.55	3.66	3.78	3.62	3.69	3.81	3.94	3.74	3.82	3.94	4.07
	Amps	13.7	14.0	14.3	14.7	14.6	14.8	15.2	15.7	15.6	15.9	16.3	16.8	16.4	16.7	17.2	17.7	17.3	17.6	18.1	18.7	18.1	18.5	19.0	19.6
	Hi PR	233	251	265	276	262	281	297	310	297	320	338	353	339	365	385	402	381	410	433	452	421	453	479	499
	Lo PR	112	119	130	139	118	126	137	146	123	131	143	152	129	137	150	160	135	144	157	167	140	149	163	173
	MBh	37.3	38.1	40.7	43.5	36.4	37.2	39.7	42.5	35.5	36.3	38.8	41.5	34.7	35.4	37.8	40.5	32.9	33.6	36.0	38.4	30.5	31.2	33.3	35.6
	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.01	0.95	0.77	0.58	1.02	0.95	0.78	0.58
	ΔT	27	26	22	18	27	26	23	18	27	26	23	18	27	26	23	18	27	26	22	18	25	24	21	17
	kW	2.84	2.89	2.98	3.07	3.04	3.11	3.20	3.30	3.23	3.30	3.40	3.51	3.39	3.46	3.57	3.69	3.53	3.60	3.72	3.84	3.65	3.73	3.85	3.97
	Amps	13.4	13.7	14.0	14.4	14.3	14.5	14.9	15.3	15.2	15.5	15.9	16.4	16.0	16.4	16.8	17.3	16.9	17.2	17.7	18.2	17.7	18.1	18.6	19.1
	Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	373	390	370	398	420	438	408	440	464	484
Lo PR	109	116	126	134	115	122	133	142	119	127	139	148	125	133	146	155	131	140	152	162	136	144	158	168	

<b>1463</b>	MBh	42.3	43.1	45.2	48.2	41.3	42.1	44.1	47.1	40.3	41.1	43.1	45.9	39.4	40.1	42.0	44.8	37.4	38.1	39.9	42.6	34.6	35.3	37.0	39.4
	S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.82
	ΔT	27	26	25	22	26	26	25	22	25	26	25	22	25	25	26	22	24	24	25	22	22	22	23	20
	kW	2.95	3.01	3.10	3.19	3.17	3.23	3.33	3.44	3.36	3.43	3.54	3.65	3.53	3.61	3.72	3.84	3.67	3.75	3.88	4.00	3.80	3.88	4.01	4.14
	Amps	13.9	14.2	14.5	14.9	14.8	15.1	15.4	15.9	15.8	16.1	16.5	17.0	16.7	17.0	17.5	18.0	17.5	17.9	18.4	19.0	18.4	18.8	19.3	19.9
	Hi PR	238	256	270	282	267	287	303	316	303	327	345	360	346	372	393	410	389	418	442	461	430	462	488	509
	Lo PR	114	122	133	141	121	128	140	149	125	133	146	155	132	140	153	163	138	147	160	171	143	152	166	177
	MBh	41.1	41.9	43.9	46.8	40.1	40.9	42.8	45.7	39.2	39.9	41.8	44.6	38.2	39.0	40.8	43.5	36.3	37.0	38.8	41.3	33.6	34.3	35.9	38.3
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78
	ΔT	28	28	26	23	28	28	26	23	28	28	26	23	27	28	27	23	26	26	26	23	24	24	24	21
<b>1300</b>	kW	2.92	2.98	3.07	3.17	3.14	3.21	3.31	3.41	3.33	3.40	3.51	3.62	3.50	3.58	3.69	3.81	3.65	3.72	3.84	3.97	3.77	3.85	3.98	4.11
	Amps	13.8	14.1	14.4	14.8	14.7	14.9	15.3	15.8	15.7	16.0	16.4	16.9	16.5	16.9	17.3	17.9	17.4	17.7	18.2	18.8	18.2	18.6	19.1	19.8
	Hi PR	235	253	268	279	264	284	300	313	300	323	341	356	342	368	389	406	385	414	437	456	425	458	483	504
	Lo PR	113	120	131	140	119	127	139	148	124	132	144	154	130	139	152	161	137	145	159	169	141	150	164	175
	MBh	37.9	38.6	40.5	43.2	37.0	37.7	39.5	42.2	36.2	36.9	38.6	41.2	35.3	36.0	37.7	40.2	33.5	34.2	35.8	38.2	31.0	31.6	33.1	35.4
	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
	ΔT	28	28	26	23	29	28	27	23	29	29	27	23	29	29	27	23	27	28	27	23	25	26	25	22
	kW	2.86	2.91	3.00	3.10	3.07	3.13	3.23	3.33	3.25	3.32	3.43	3.54	3.42	3.49	3.60	3.72	3.56	3.63	3.75	3.87	3.68	3.76	3.88	4.01
	Amps	13.5	13.8	14.1	14.5	14.4	14.6	15.0	15.4	15.3	15.6	16.0	16.5	16.2	16.5	16.9	17.4	17.0	17.3	17.8	18.4	17.8	18.2	18.7	19.3
	Hi PR	228	246	260	271	256	276	291	304	291	314	331	345	332	357	377	393	373	402	424	443	413	444	469	489
Lo PR	110	117	127	136	116	123	135	143	120	128	140	149	127	135	147	157	133	141	154	164	137	146	159	170	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

EXPANDED COOLING DATA — WGGE4560A\*\*\*M — Two Stage

IDB	Airflow	Outdoor Ambient Temperature												Entering Indoor Wet Bulb Temperature												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	2036	MBh	55.4	57.4	62.9	-	54.1	56.1	61.4	-	52.8	54.7	59.9	-	51.5	53.4	58.5	-	48.9	50.7	55.6	-	45.3	47.0	51.5	-
		S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	
	kW	4.41	4.50	4.64	-	4.73	4.83	4.98	-	5.02	5.12	5.28	-	5.27	5.38	5.55	-	5.48	5.60	5.77	-	5.66	5.78	5.97	-	
	Amps	21.5	21.8	22.4	-	22.7	23.1	23.7	-	24.2	24.6	25.3	-	25.4	25.9	26.6	-	26.7	27.2	27.9	-	28.0	28.5	29.3	-	
	Hi PR	256	276	291	-	288	310	327	-	327	352	372	-	373	401	424	-	419	451	477	-	463	499	527	-	
	Lo PR	107	114	124	-	113	120	131	-	118	125	137	-	124	131	144	-	130	138	150	-	134	143	156	-	
	MBh	53.8	55.7	61.0	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.2	53.9	-	44.0	45.6	50.0	-	
	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	
	ΔT	20	17	13	-	20	18	13	-	20	18	13	-	21	18	14	-	20	18	13	-	19	16	12	-	
1584	2036	MBh	4.38	4.47	4.60	-	4.70	4.79	4.94	-	4.98	5.08	5.24	-	5.23	5.34	5.50	-	5.44	5.55	5.73	-	5.62	5.74	5.92	-
		Amps	21.3	21.7	22.2	-	22.6	23.0	23.5	-	24.0	24.5	25.1	-	25.3	25.7	26.4	-	26.5	27.0	27.7	-	27.8	28.3	29.1	-
	Hi PR	254	273	289	-	285	307	324	-	324	349	368	-	369	397	419	-	415	447	472	-	459	494	521	-	
	Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	133	141	154	-	
	MBh	49.6	51.4	56.3	-	48.5	50.2	55.0	-	47.3	49.0	53.7	-	46.2	47.8	52.4	-	43.8	45.4	49.8	-	40.6	42.1	46.1	-	
	S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
	ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-	
	kW	4.28	4.37	4.50	-	4.59	4.68	4.82	-	4.86	4.96	5.11	-	5.10	5.21	5.37	-	5.31	5.42	5.59	-	5.48	5.60	5.78	-	
	Amps	20.9	21.3	21.8	-	22.1	22.5	23.1	-	23.5	24.0	24.6	-	24.7	25.2	25.8	-	25.9	26.4	27.1	-	27.1	27.7	28.4	-	
	Hi PR	246	265	280	-	276	297	314	-	314	338	357	-	358	385	407	-	403	433	458	-	445	479	506	-	
Lo PR	103	109	120	-	109	116	126	-	113	120	131	-	119	126	138	-	124	132	144	-	129	137	149	-		
75	2036	MBh	56.3	58.0	62.7	67.3	55.0	56.6	61.3	65.8	53.7	55.3	59.8	64.2	52.4	53.9	58.4	62.6	49.8	51.2	55.5	59.5	46.1	47.5	51.4	55.1
		S/T	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11	
	kW	4.45	4.54	4.67	4.81	4.77	4.87	5.02	5.17	5.06	5.16	5.32	5.49	5.31	5.42	5.59	5.77	5.52	5.64	5.82	6.01	5.71	5.83	6.02	6.21	
	Amps	21.6	22.0	22.5	23.1	22.9	23.3	23.9	24.5	24.4	24.8	25.4	26.2	25.6	26.1	26.8	27.6	26.9	27.4	28.2	29.0	28.2	28.7	29.5	30.4	
	Hi PR	259	279	294	307	291	313	330	345	331	356	376	392	377	405	428	446	424	456	481	502	468	504	532	555	
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
	MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.3	50.9	52.4	56.7	60.8	48.3	49.7	53.8	57.8	44.7	46.1	49.9	53.5	
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	
	ΔT	23	21	18	12	24	22	18	12	24	22	18	12	24	22	18	12	23	22	18	12	22	20	17	11	
1584	2036	MBh	4.41	4.50	4.64	4.78	4.73	4.83	4.98	5.13	5.02	5.12	5.28	5.45	5.27	5.38	5.55	5.72	5.48	5.60	5.77	5.96	5.66	5.78	5.97	6.16
		Amps	21.5	21.8	22.4	23.0	22.7	23.1	23.7	24.4	24.2	24.6	25.3	26.0	25.5	25.9	26.6	27.4	26.7	27.2	28.0	28.8	28.0	28.5	29.3	30.2
	Hi PR	257	276	292	304	288	310	327	341	327	352	372	388	373	401	424	442	419	451	477	497	463	499	527	549	
	Lo PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	
	MBh	50.5	51.9	56.2	60.3	49.3	50.7	54.9	58.9	48.1	49.5	53.6	57.5	46.9	48.3	52.3	56.1	44.6	45.9	49.7	53.3	41.3	42.5	46.0	49.4	
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	
	ΔT	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	12	
	kW	4.32	4.40	4.53	4.67	4.63	4.72	4.86	5.01	4.90	5.00	5.16	5.32	5.14	5.25	5.41	5.59	5.35	5.46	5.63	5.81	5.53	5.64	5.82	6.01	
	Amps	21.0	21.4	21.9	22.5	22.3	22.7	23.2	23.9	23.7	24.1	24.7	25.4	24.9	25.4	26.0	26.8	26.1	26.6	27.3	28.2	27.3	27.9	28.6	29.5	
	Hi PR	249	268	283	295	279	300	317	331	318	342	361	376	362	389	411	429	407	438	462	482	450	484	511	533	
Lo PR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions.  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power


EXPANDED COOLING DATA — WGGE4560A\*\*\*M — Two Stage (CONT.)

IDB	Airflow	Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	2036	MBh	57.3	58.6	62.6	66.9	56.0	57.2	61.1	65.3	54.6	55.8	59.6	63.8	53.3	54.5	58.2	62.2	50.6	51.7	55.3	59.1	46.9	47.9	51.2	54.7
		S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63
		ΔT	25	24	21	17	25	24	21	17	24	25	21	17	24	25	21	17	23	23	21	17	21	22	20	16
		kW	4.48	4.57	4.71	4.85	4.81	4.91	5.06	5.22	5.10	5.20	5.37	5.54	5.35	5.46	5.64	5.82	5.57	5.69	5.87	6.06	5.75	5.88	6.07	6.27
		Amps	21.7	22.1	22.7	23.3	23.0	23.5	24.0	24.7	24.5	25.0	25.6	26.4	25.8	26.3	27.0	27.8	27.1	27.6	28.4	29.2	28.4	28.9	29.7	30.6
		Hi/PR	262	282	297	310	294	316	334	348	334	359	380	396	380	409	432	451	428	461	486	507	473	509	537	560
	Lo/PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169	
	MBh	55.6	56.9	60.7	64.9	54.3	55.5	59.3	63.4	53.0	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.2	53.7	57.4	45.5	46.5	49.7	53.2	
	S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60	
	ΔT	26	25	22	17	26	25	22	18	26	25	22	18	26	25	22	18	25	25	22	17	23	23	20	16	
	kW	4.45	4.54	4.67	4.82	4.77	4.87	5.02	5.17	5.06	5.16	5.32	5.49	5.31	5.42	5.59	5.77	5.52	5.64	5.82	6.01	5.71	5.83	6.02	6.21	
	Amps	21.6	22.0	22.5	23.1	22.9	23.3	23.9	24.5	24.4	24.8	25.4	26.2	25.6	26.1	26.8	27.6	26.9	27.4	28.2	29.0	28.2	28.7	29.5	30.4	
Hi/PR	259	279	294	307	291	313	330	345	331	356	376	392	377	405	428	446	424	456	482	502	468	504	532	555		
Lo/PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167		
MBh	51.4	52.5	56.1	59.9	50.2	51.3	54.8	58.5	49.0	50.0	53.5	57.1	47.8	48.8	52.1	55.7	45.4	46.4	49.5	53.0	42.0	43.0	45.9	49.1		
S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.01	0.95	0.77	0.58	1.02	0.95	0.78	0.58		
ΔT	26	25	22	18	27	26	22	18	27	26	22	18	27	26	22	18	27	26	22	18	25	24	21	17		
kW	4.35	4.43	4.57	4.70	4.66	4.76	4.90	5.05	4.94	5.04	5.20	5.36	5.18	5.29	5.46	5.63	5.39	5.51	5.68	5.86	5.57	5.69	5.87	6.06		
Amps	21.2	21.5	22.1	22.7	22.4	22.8	23.4	24.0	23.9	24.3	24.9	25.6	25.1	25.6	26.2	27.0	26.3	26.8	27.5	28.4	27.5	28.1	28.8	29.7		
Hi/PR	251	270	286	298	282	304	321	334	321	345	365	380	365	393	415	433	411	442	467	487	454	489	516	538		
Lo/PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162		
85	2036	MBh	58.3	59.4	62.2	66.4	56.9	58.1	60.8	64.9	55.6	56.7	59.4	63.3	54.2	55.3	57.9	61.8	51.5	52.5	55.0	58.7	47.7	48.7	51.0	54.4
		S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.82
		ΔT	26	26	25	21	26	26	25	22	25	26	25	22	24	25	25	22	23	24	25	22	22	22	23	20
		kW	4.52	4.61	4.74	4.89	4.85	4.94	5.10	5.26	5.14	5.24	5.41	5.58	5.39	5.51	5.68	5.87	5.61	5.73	5.92	6.11	5.80	5.93	6.12	6.32
		Amps	21.9	22.3	22.8	23.4	23.2	23.6	24.2	24.9	24.7	25.2	25.8	26.6	26.0	26.5	27.2	28.0	27.3	27.8	28.6	29.4	28.6	29.2	29.9	30.9
		Hi/PR	264	284	300	313	297	319	337	352	337	363	383	400	384	413	437	455	432	465	491	512	478	514	543	566
	Lo/PR	110	117	128	137	117	124	135	144	121	129	141	150	127	135	148	158	133	142	155	165	138	147	160	171	
	MBh	56.6	57.7	60.4	64.5	55.3	56.4	59.0	63.0	54.0	55.0	57.6	61.5	52.7	53.7	56.2	60.0	50.0	51.0	53.4	57.0	46.3	47.2	49.5	52.8	
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78	
	ΔT	28	27	26	22	28	28	26	23	27	28	26	23	27	27	26	23	25	26	26	22	24	24	24	21	
	kW	4.48	4.57	4.71	4.85	4.81	4.91	5.06	5.22	5.10	5.20	5.37	5.54	5.35	5.46	5.64	5.82	5.57	5.69	5.87	6.06	5.75	5.88	6.07	6.27	
	Amps	21.7	22.1	22.7	23.3	23.0	23.5	24.0	24.7	24.5	25.0	25.6	26.4	25.8	26.3	27.0	27.8	27.1	27.6	28.4	29.2	28.4	28.9	29.7	30.6	
Hi/PR	262	282	297	310	294	316	334	348	334	359	380	396	380	409	432	451	428	461	486	507	473	509	537	560		
Lo/PR	109	116	127	135	116	123	134	143	120	128	139	148	126	134	146	156	132	141	153	163	137	145	159	169		
MBh	52.2	53.3	55.8	59.5	51.0	52.0	54.5	58.1	49.8	50.8	53.2	56.7	48.6	49.5	51.9	55.4	46.2	47.1	49.3	52.6	42.8	43.6	45.7	48.7		
S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75		
ΔT	28	28	26	23	29	28	27	23	29	28	27	23	28	28	27	23	27	27	26	23	25	25	25	21		
kW	4.38	4.47	4.60	4.74	4.70	4.79	4.94	5.09	4.98	5.08	5.24	5.40	5.22	5.33	5.50	5.68	5.43	5.55	5.73	5.91	5.62	5.74	5.92	6.11		
Amps	21.3	21.7	22.2	22.8	22.6	23.0	23.5	24.2	24.0	24.5	25.1	25.8	25.3	25.7	26.4	27.2	26.5	27.0	27.7	28.6	27.7	28.3	29.0	29.9		
Hi/PR	254	273	288	301	285	307	324	338	324	349	368	384	369	397	419	437	415	447	472	492	459	494	521	544		
Lo/PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 Amps = outdoor unit amps (comp.+fan)  
 kW = Total system power

# PRODUCT SPECIFICATIONS


## DIMENSIONS

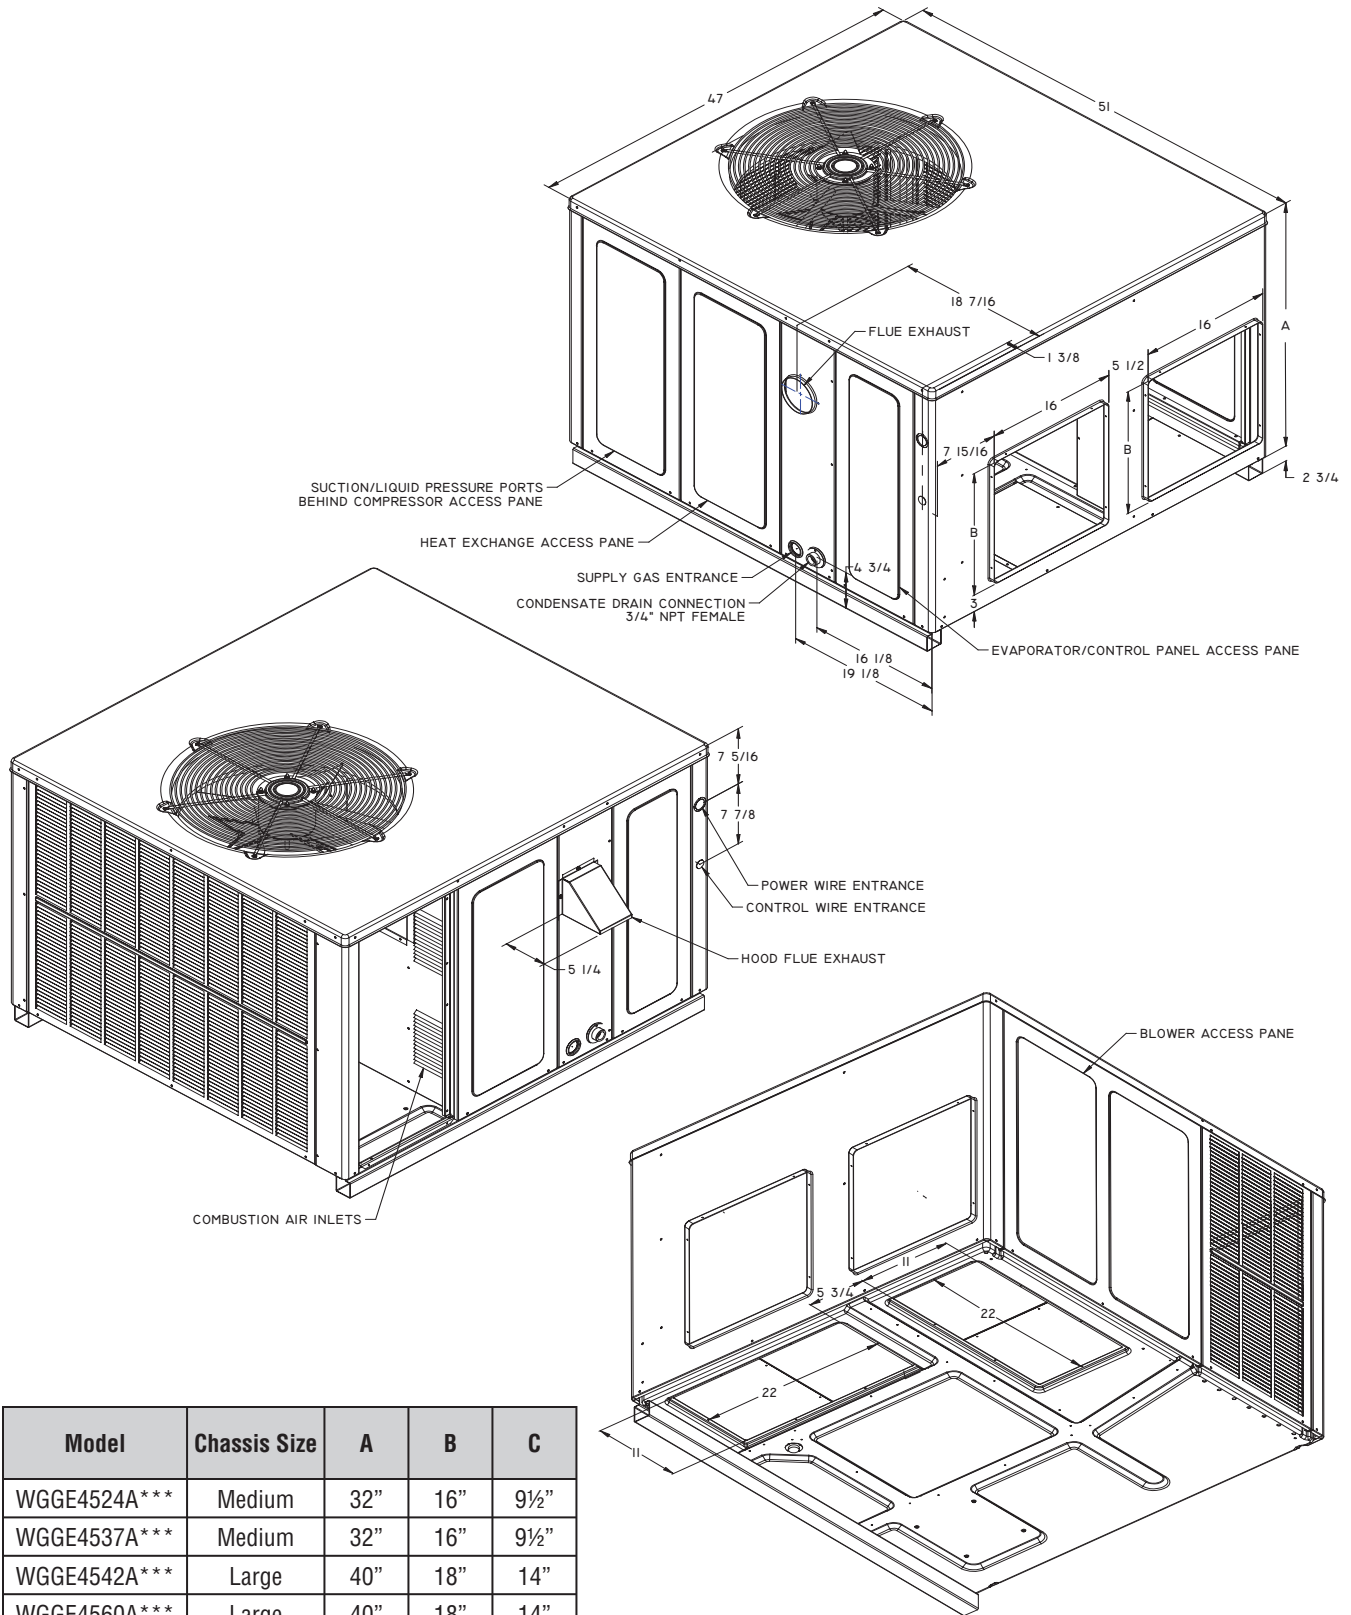

Model	Chassis Size	A	B	C
WGGE4524A***	Medium	32"	16"	9½"
WGGE4537A***	Medium	32"	16"	9½"
WGGE4542A***	Large	40"	18"	14"
WGGE4560A***	Large	40"	18"	14"



# WIRING DIAGRAMS

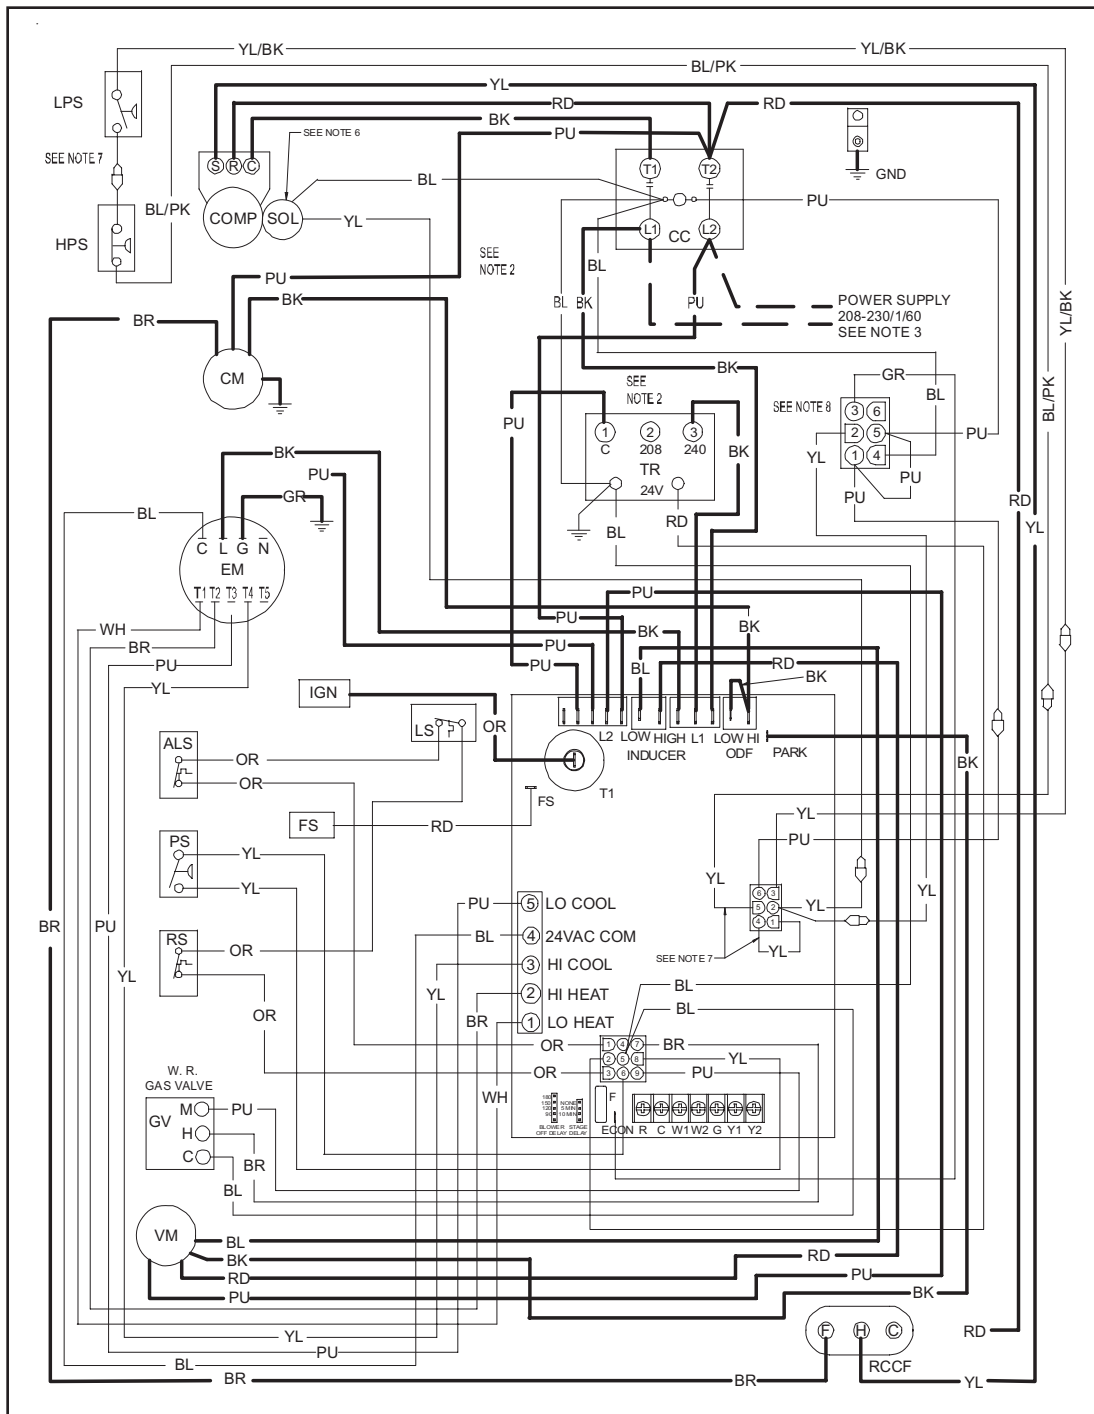

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

**⚠ WARNING**

**HIGH VOLTAGE!**

**Disconnect all power before servicing or installing this unit.**


**Multiple power sources may be present.**

**Failure to do so may cause property damage, personal injury, or death.**



# PRODUCT SPECIFICATIONS

## WIRING DIAGRAMS (CONT.)

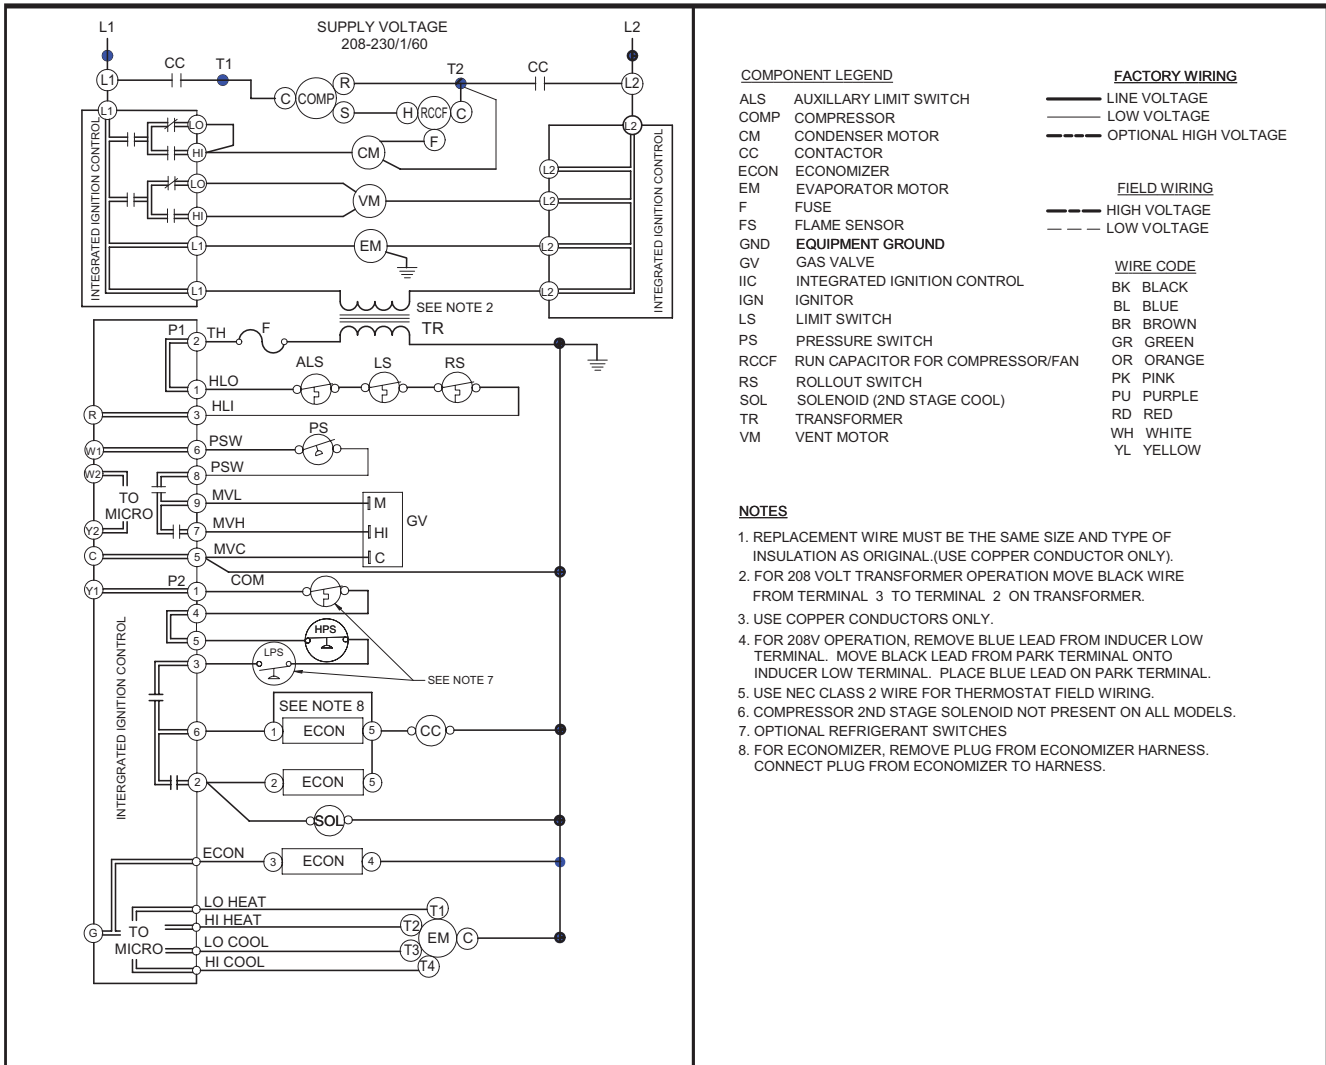

DIAGNOSTIC LED - RED	STATUS	CHECK
ON	NORMAL OPERATION	-
OFF	NO POWER OR INTERNAL CONTROL FAULT	CHECK INPUT POWER CHECK FUSE(S) REPLACE CONTROL
1 FLASH	IGNITION FAILURE	GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR
2 FLASHES	PRESSURE SWITCH OPEN	CHECK PRESSURE SWITCH CHECK TUBING CHECK VENT MOTOR
3 FLASHES	PRESSURE SWITCH CLOSED WITHOUT INDUCER ON	CHECK PRESSURE SWITCH CHECK WIRING FOR SHORTS
4 FLASHES	OPEN LIMIT SWITCH	CHECK MAIN LIMIT SWITCH CHECK AUXILIARY LIMIT SW. CHECK ROLLOUT LIMIT SW.
5 FLASHES	FALSE FLAME DETECTED	CHECK GAS VALVE CHECK FOR SHORTS IN FLAME SENSOR WIRING
6 FLASHES	COMPR. SHORT CYCLE DELAY	3 MIN COMP. SHORT CYCLE DELAY

DIAGNOSTIC LED - RED	STATUS	CHECK
7 FLASHES	LIMIT OPEN 5 TIMES IN SAME CALL FOR HEAT	CHECK MAIN LIMIT SWITCH CHECK AUXILIARY LIMIT SW.
8 FLASHES	IDT/ODT OPEN	CHECK JUMPER BETWEEN 1 AND 4 ON 6-CIRCUIT CONNECTOR CHECK OPTIONAL REFRIGERANT SWITCHES
9 FLASHES	PSW/LOC OPEN	CHECK REFRIGERANT SWITCHES FOR LOSS OF CHARGE OR HIGH HEAD PRESSURE

DIAGNOSTIC LED - AMBER	STATUS	CHECK
OFF	NO FLAME PRESENT	-
ON	NORMAL FLAME PRESENT	-
1 FLASH	LOW FLAME SIGNAL	GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR
2 FLASHES	FALSE FLAME DETECTED	CHECK GAS VALVE CHECK FOR SHORTS IN FLAME SENSOR WIRING

0140G00533 REV A

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

**ACCESSORIES**

Description	Part Numbers		
	Small Chassis	Medium Chassis	Large Chassis
Concentric Converter	CDK1-2	CDK1-2	CDK3
Horizontal Duct Cover	---	20464501PDGK	20464502PDGK
Downflow Economizer	PGED101	PGED102	PGED103
Horizontal Economizer	PGEH101	PGEH102	PGEH103
Filter Rack	PGFR101	PGFR102	PGFR103
Downflow Manual Damper	PGMDD101	PGMDD102	PGMDD103
Downflow Motorized Damper	PGMDMD101	PGMDMD102	PGMDMD103
Horizontal Manual Damper	PGMDH101	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH101	PGMDMH102	PGMDMH103
Roof Curb	PGC101	PGC102	PGC103
Downflow Square-to-Round	SQRPG101	SQRPG102	SQRPG103
Horizontal Square-to-Round	SQRPGH101	SQRPGH102	SQRPGH103
The above accessories are offered by McDaniel Metals • Main: (281) 987-8400 • Fax: (281) 987-9494			
LPT-00A	L.P. Conversion Kit		

**NOTES**

